



DIN
1988



DIN EN
806

 **bar**


max. 10
0,5 5 1

 °C


max. 70° 60°

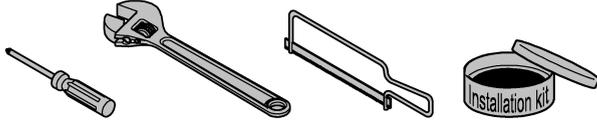

1

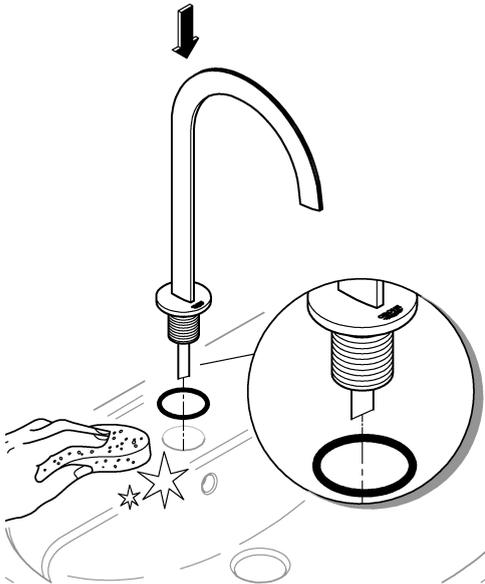


2

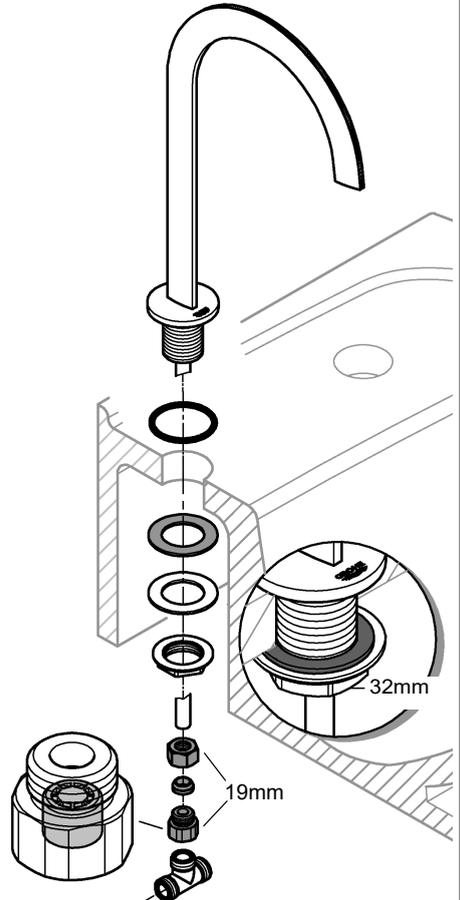






3






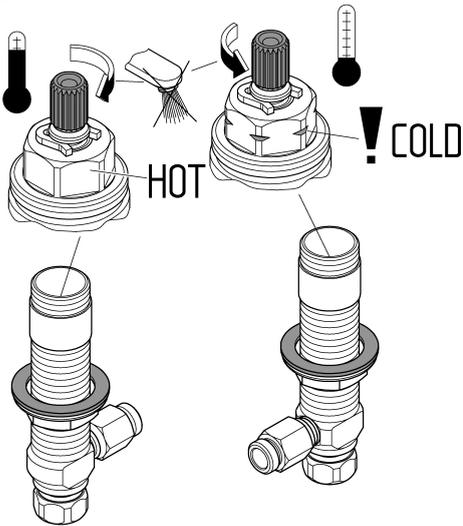




4

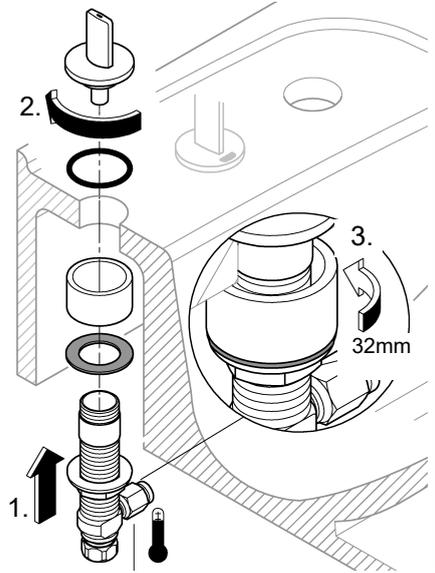

5

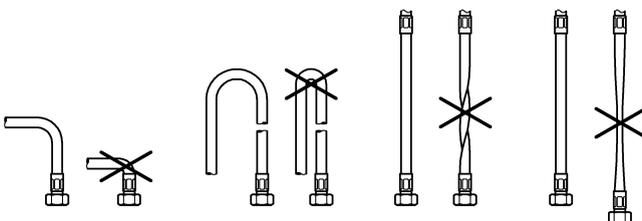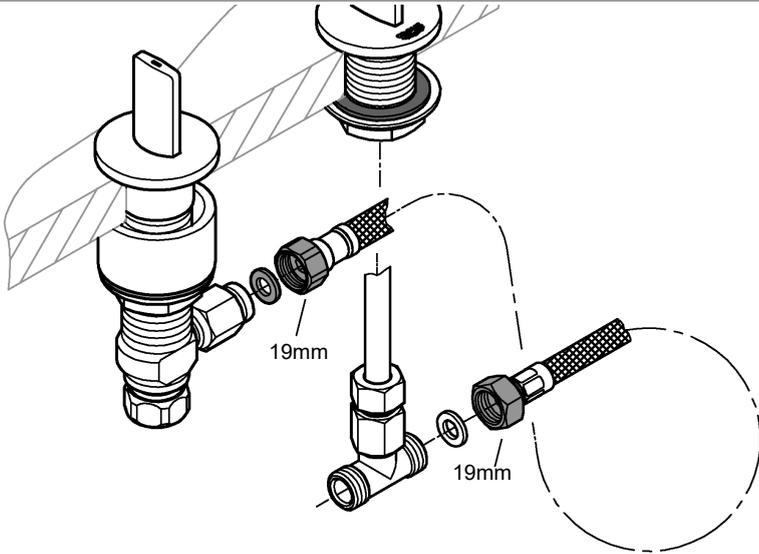

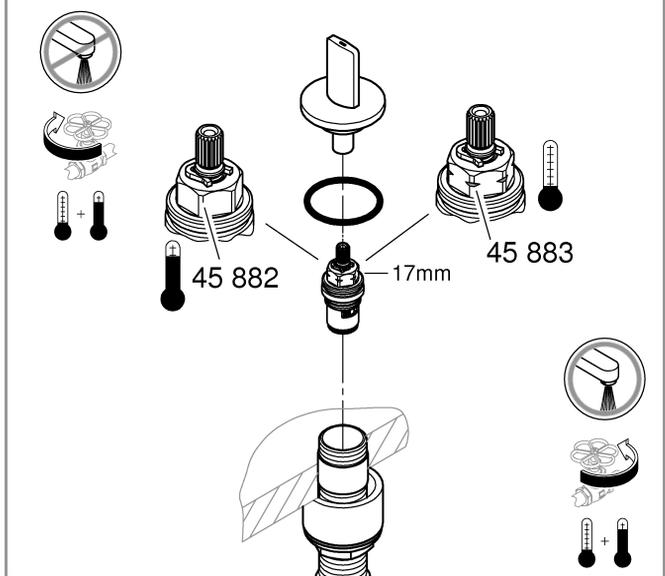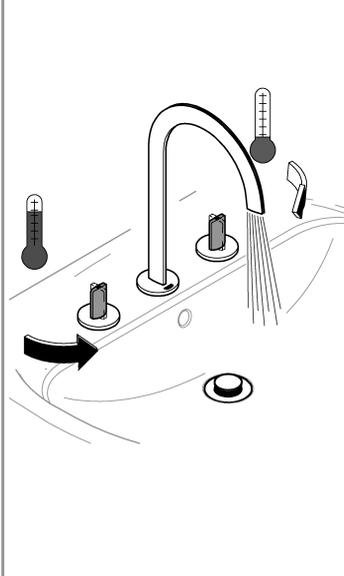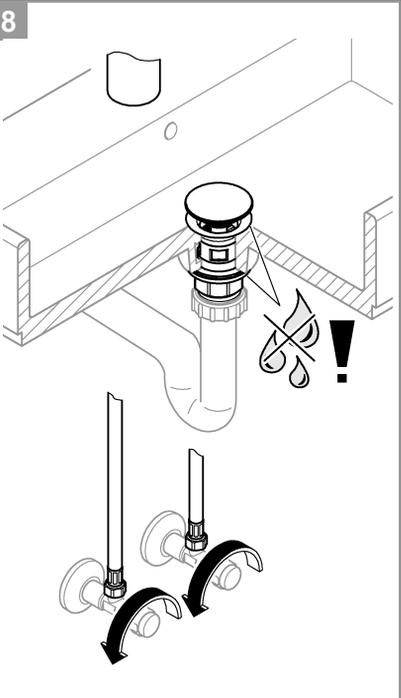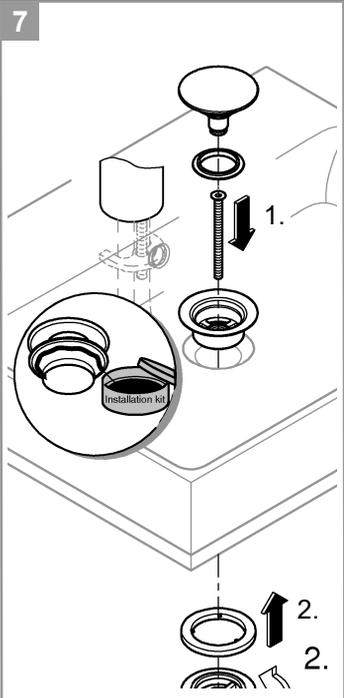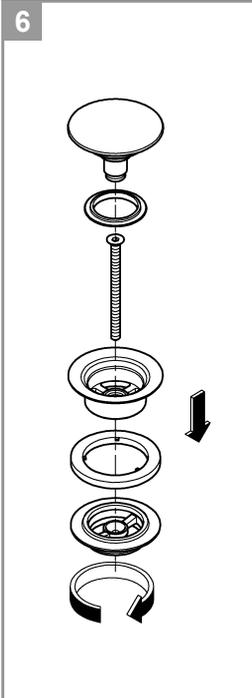

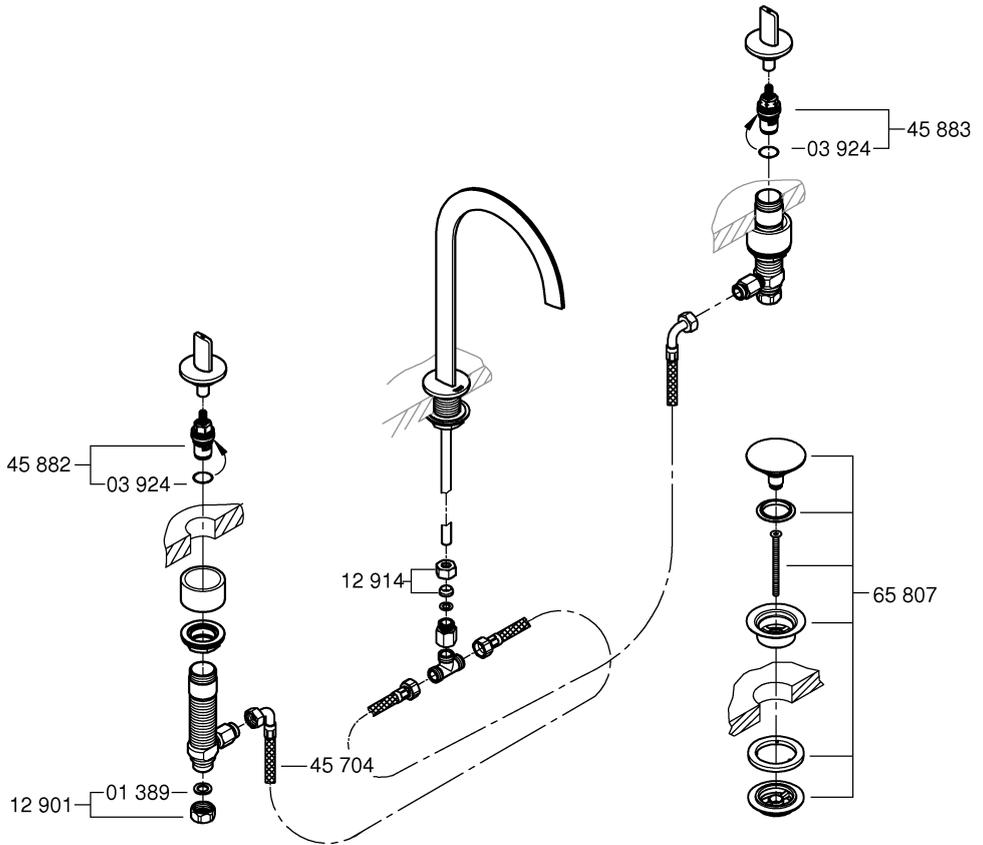

	12 901	Ø10,5
	*12 902	Ø14,3

