






DIN EN 806
DIN EN 1717
DIN 1988

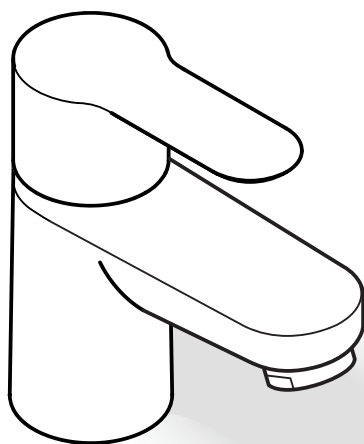


bar
max. 10
0,5 5 1


°C
max. 70°
60°




*19 332 32mm
*19 017 13mm




1a

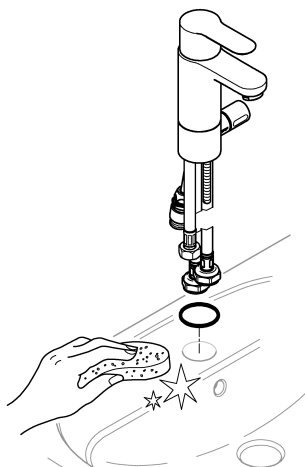

1b


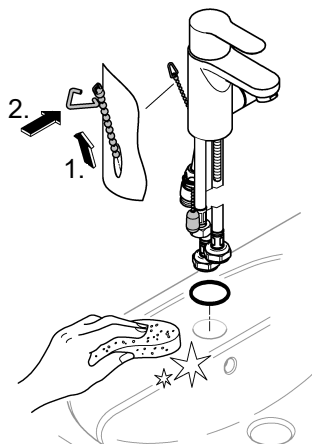


2

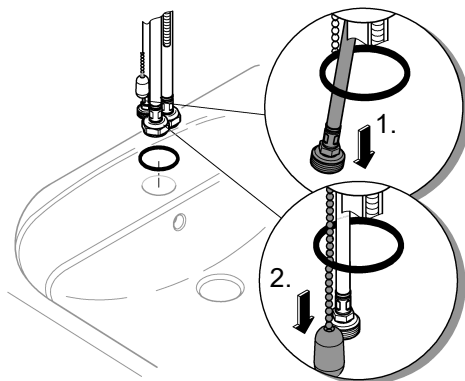





3

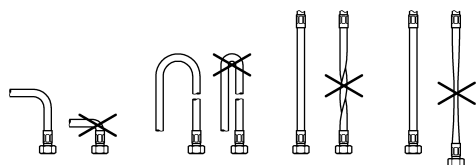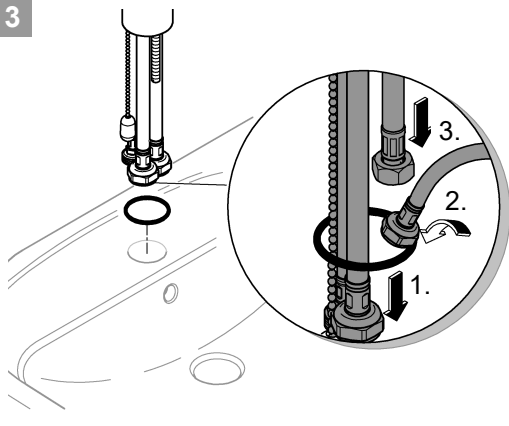


4

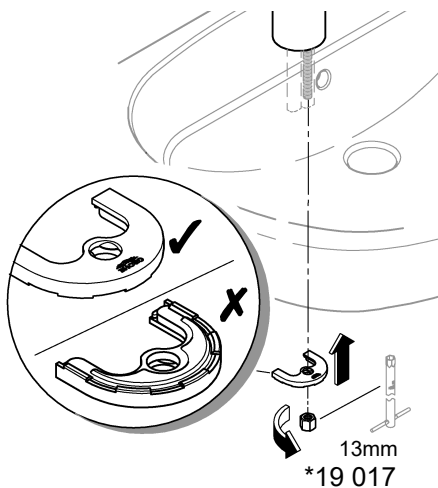


5

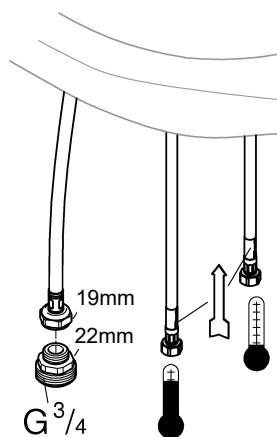

6

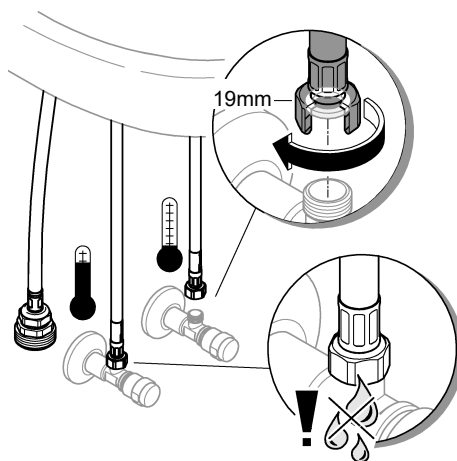

7





8

