




DIN EN
806

DIN
1988

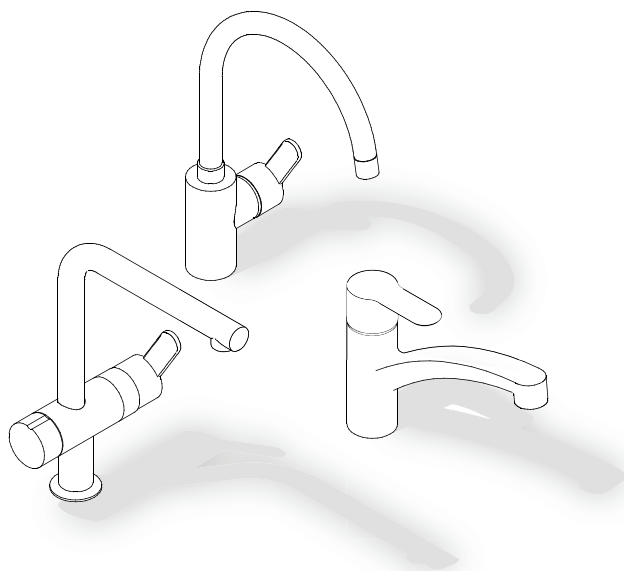



 **bar**

max.
10
0,5



 **°C**



max.
70°





32mm
*19 332




1

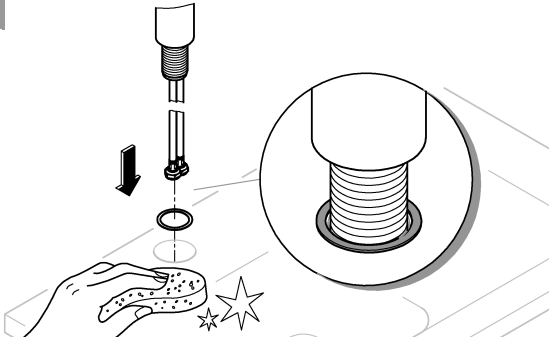

2




3


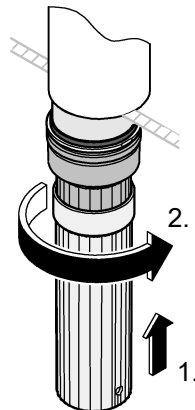







4a

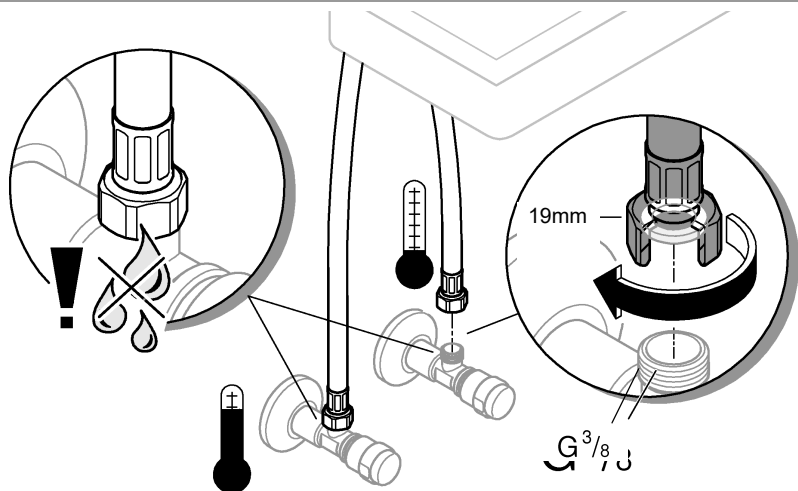



4b

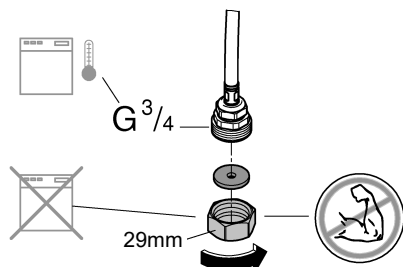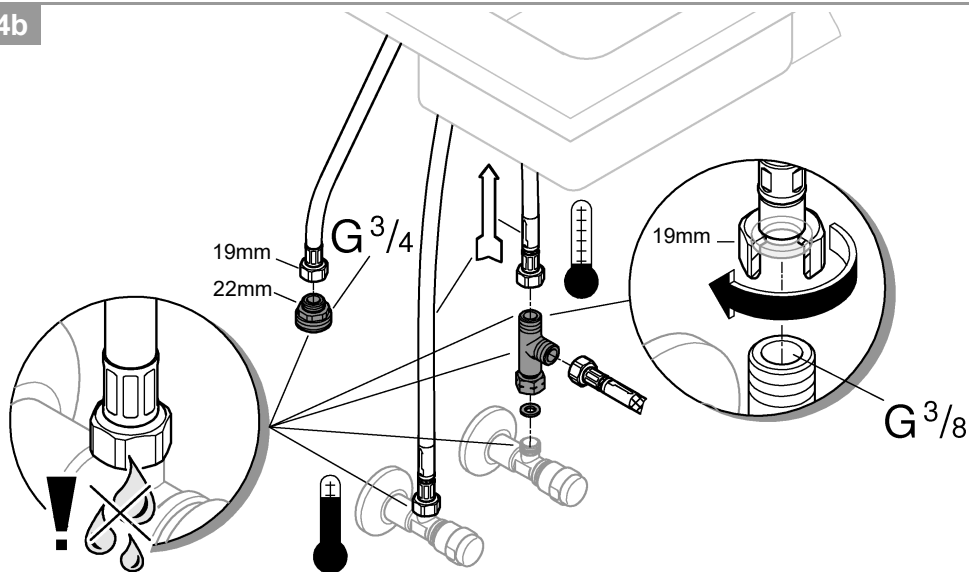

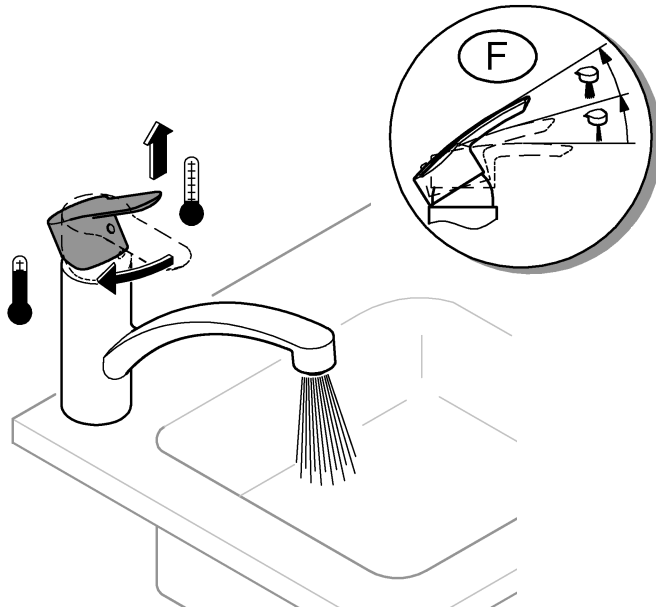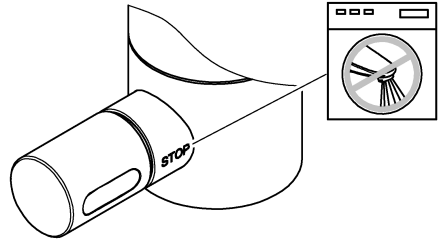
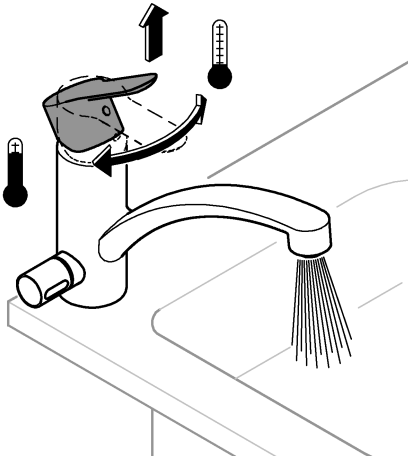






optional

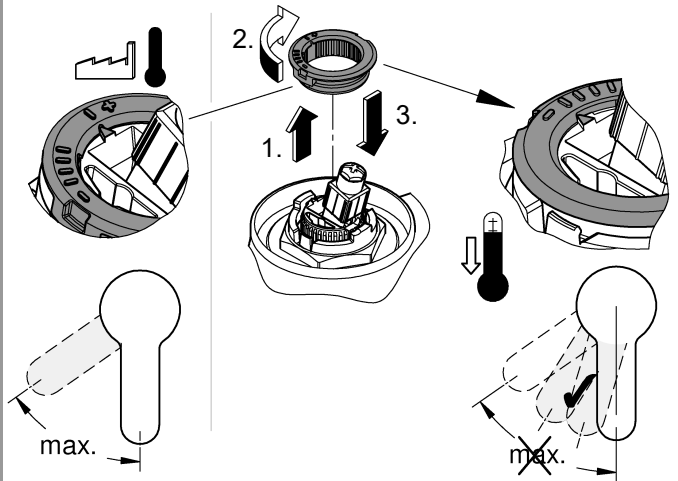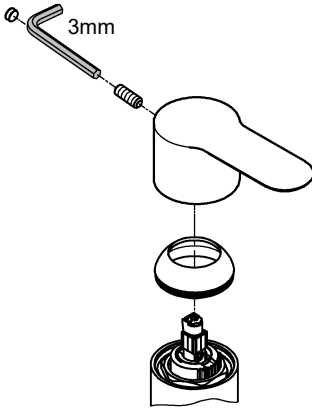


optional

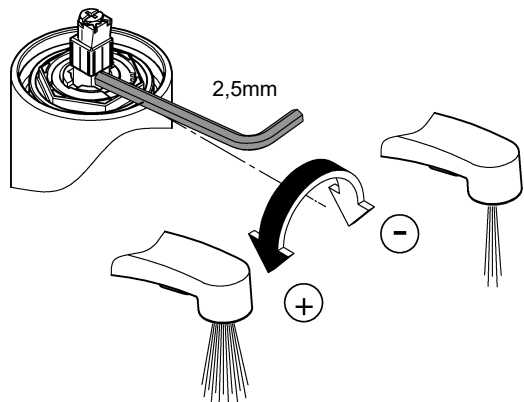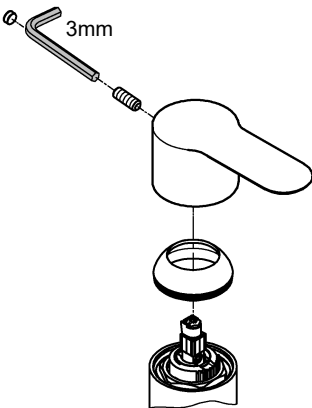


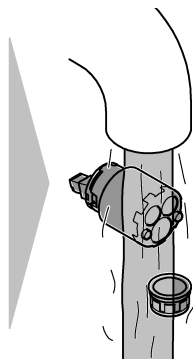

3mm



3mm






*19 332

max. 7Nm




32mm

max. 12Nm

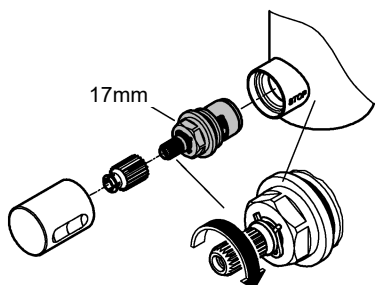

17mm





A series of horizontal lines for writing, consisting of 20 evenly spaced lines across the page.

