




DIN EN
806

DIN EN
1717

DIN
1988


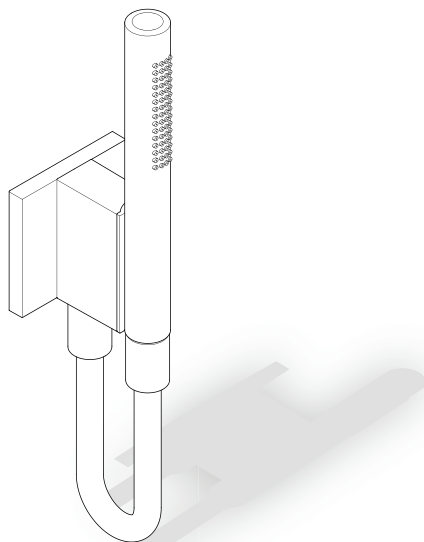


 **bar**

max. 10
0,5  5
1 

 **°C**


max. 70°  60° 




2mm
6mm




1

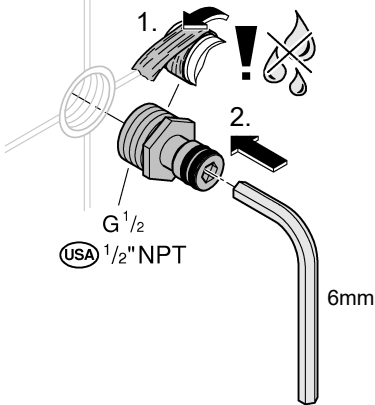

2

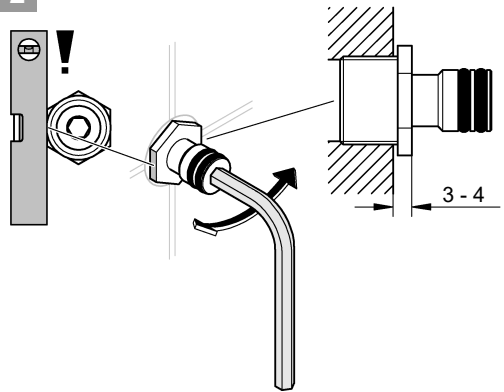


3

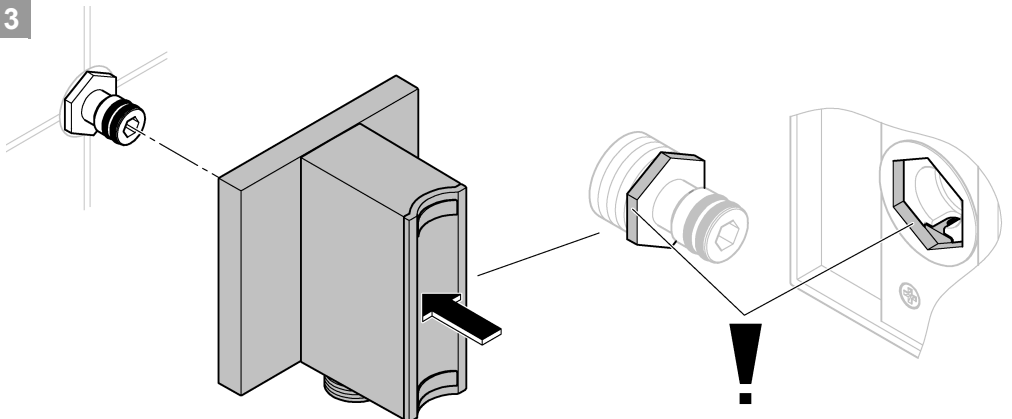






4

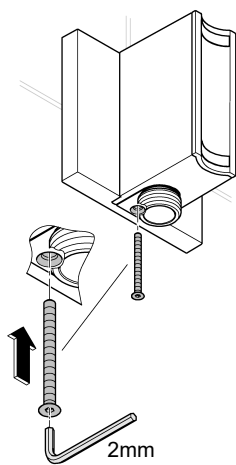


5

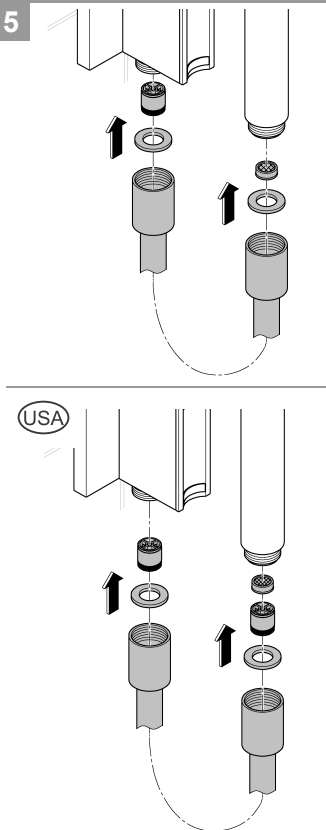

6

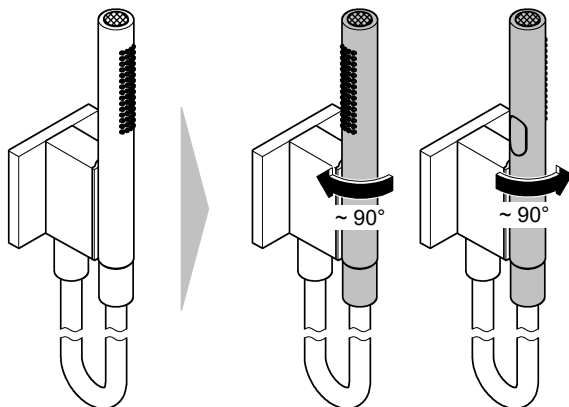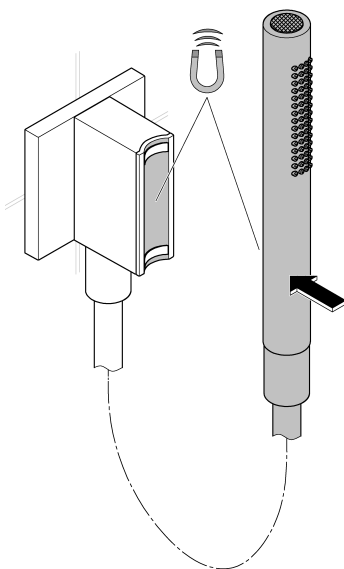

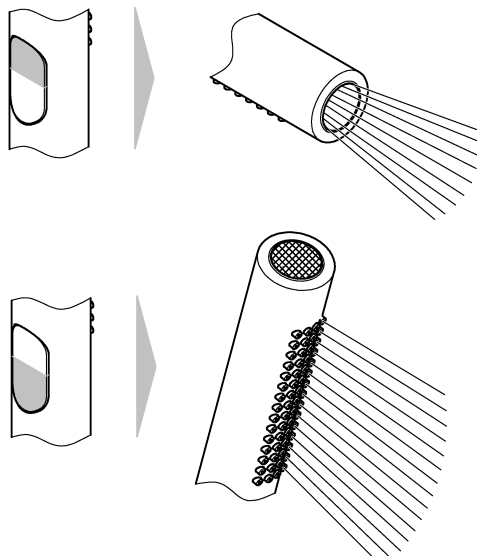

MAINTENANCE

