


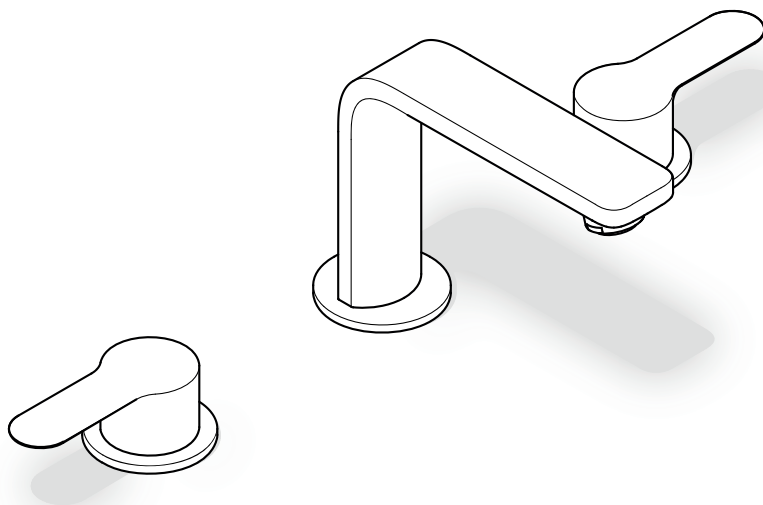




 DIN EN 806 DIN EN 1717 DIN 1988	 bar max. 0,5 10 thumbs up 5 1	 °C max. 70° thumbs up 60°
		

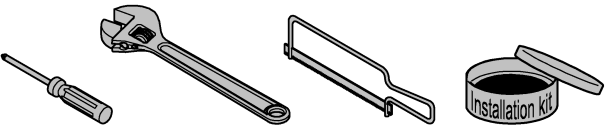


1

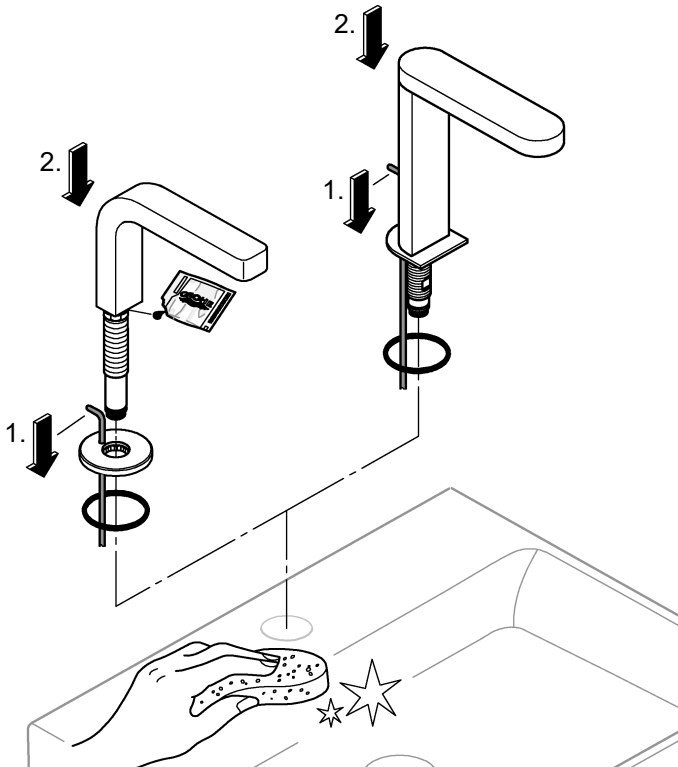





2

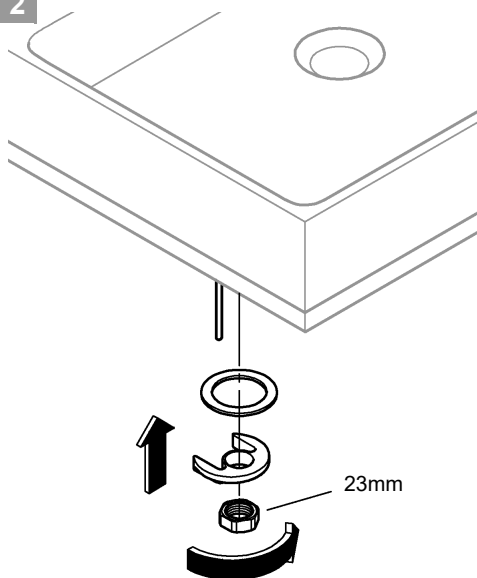


3

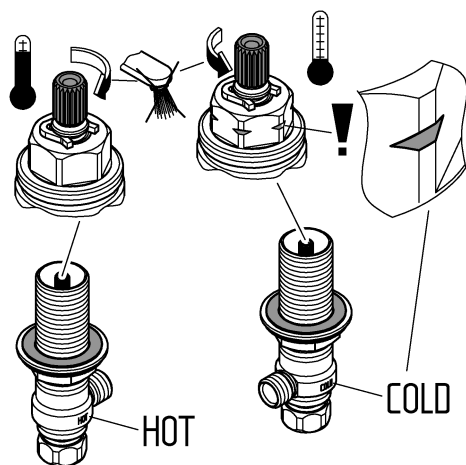

4a

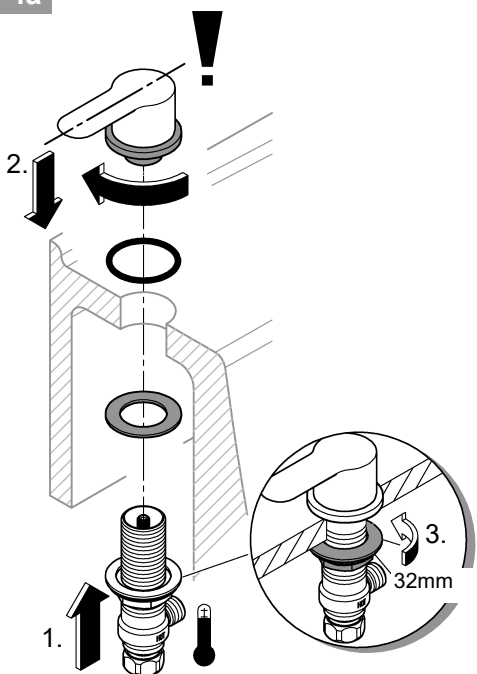


4b


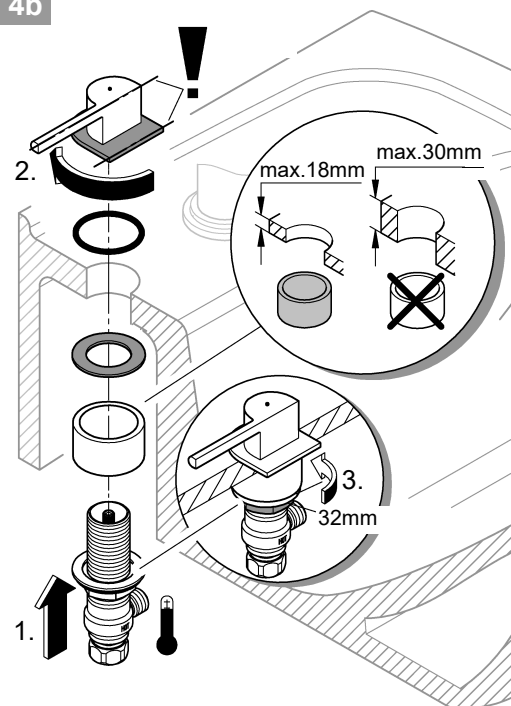





5

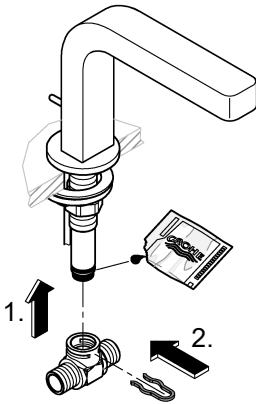


6

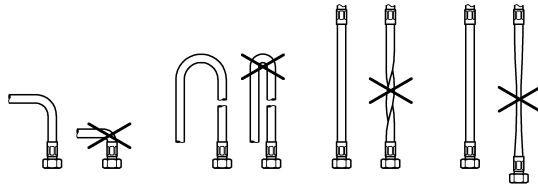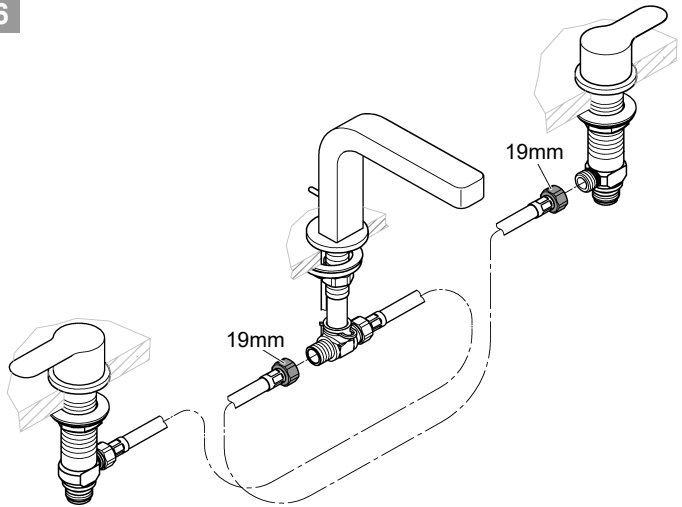

7

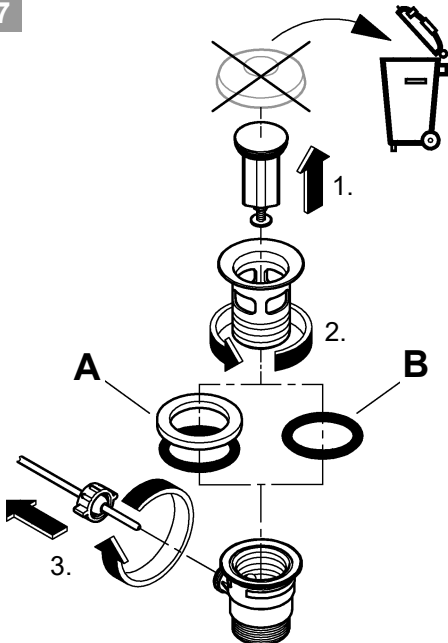


8

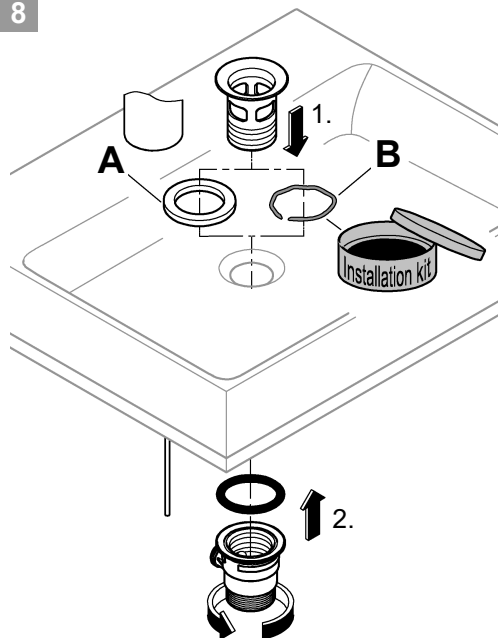





9

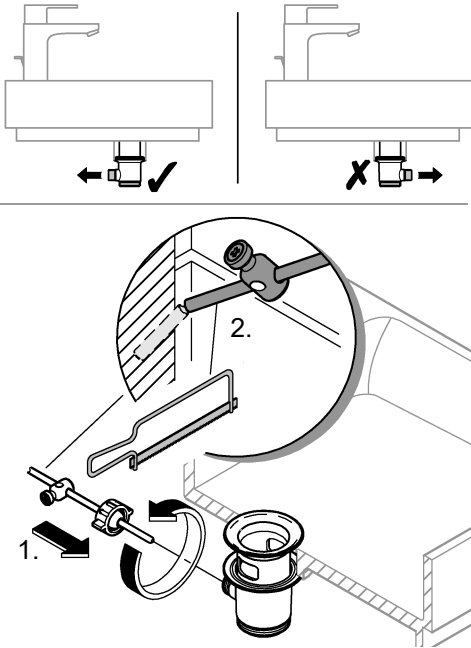

10

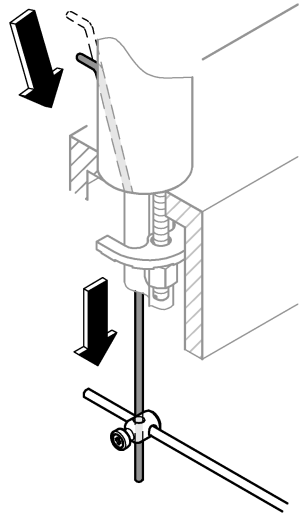

11

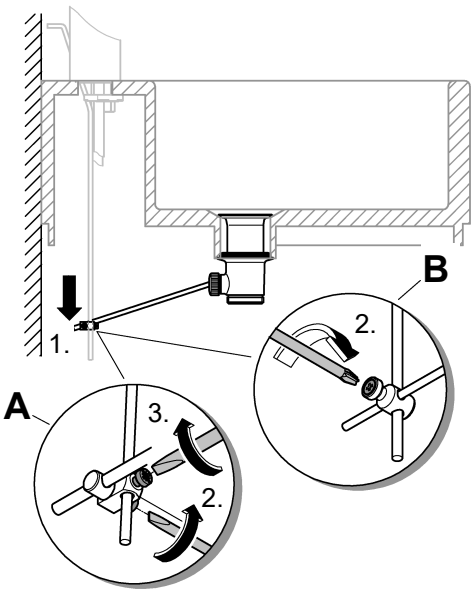

12

