

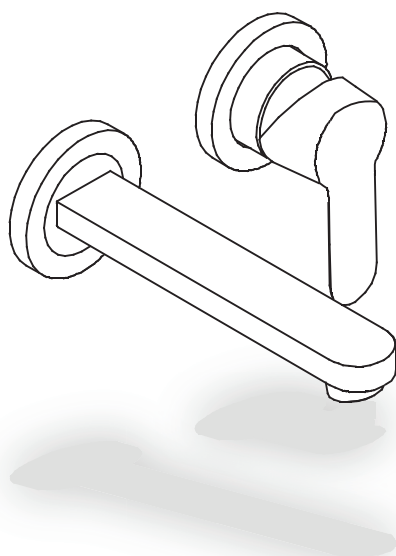



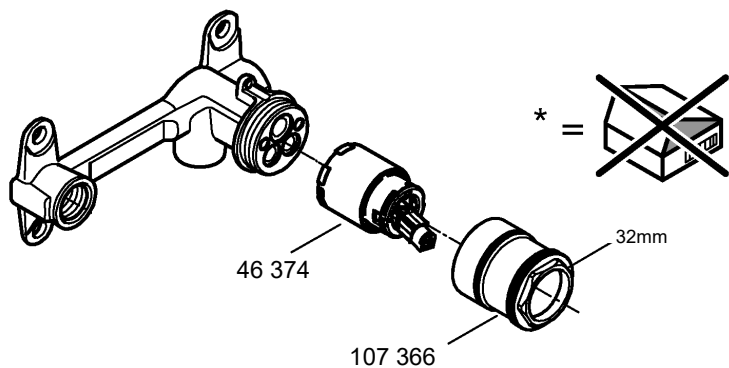


*19 332	32mm

X	42 630	—	—	107 364

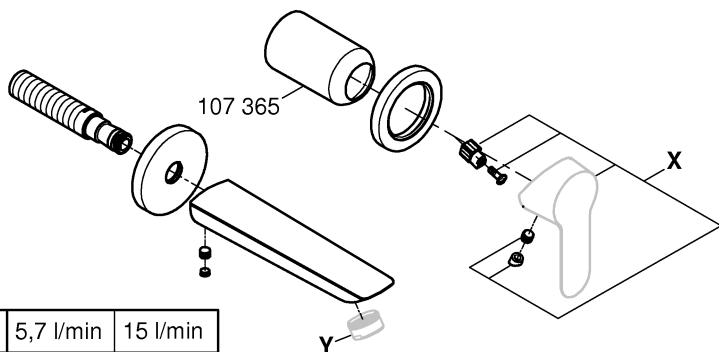

	5,7 l/min	15 l/min
Y	48 159	13 929





DIN EN
806

DIN
1988






bar

0,5 max. 10 5 1

°C


max. 70° 60°




*19 332
32mm




1

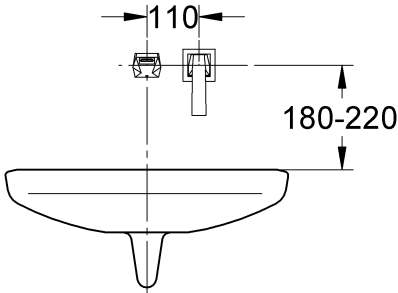


2

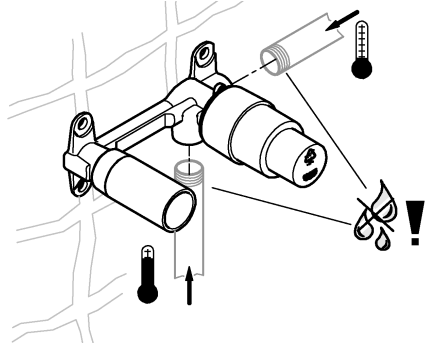

3




min.




max.


30



4




5

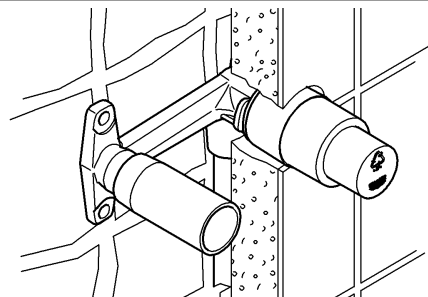





6

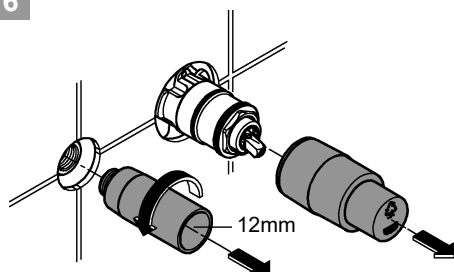


7




8

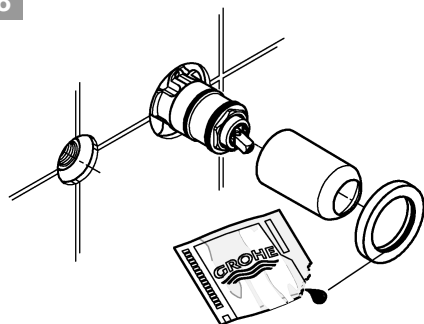


9

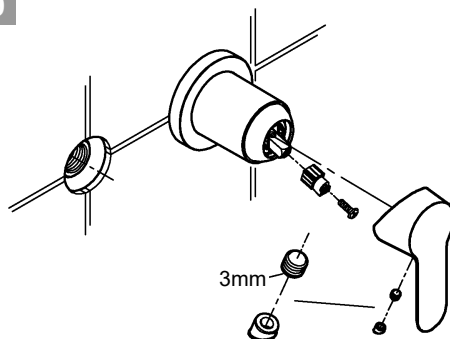

10



11



12

