Pure Freude an Wasser





GROHE KITCHEN SELECTION BRAND





QUALITY

From the first design sketch to the final product to after-sales services: Our customers can rely on our Made in Germany sense of perfectionism.

"No.1 most trusted brand in the sanitary industry" – Wirtschaftswoche, 2017

TECHNOLOGY

We constantly drive innovation to enrich your everyday water experience, delivering smart solutions on the path of the digitization of water.

"Top 50 companies to change the world" – Fortune Magazine, 2017



DESIGN

Our highly awarded design DNA's recipe for success is simple: Merging the contemporary and the timeless into products that feel like they were designed just for you.

Over 400 design awards won since 2003 (IF GOLD AWARD Winner 2020, SmartControl Kitchen)



SUSTAINABILITY

Water is our passion. We care about every drop and our CSR commitment goes even beyond one element alone: We strive to protect all of our planet's resources for future generations.


Double award winner of the German Sustainability Award 2021



GROHE **PVD**

Made-to-last surfaces ranging from precious matt to shiny like a diamond. The special recipe to success lies in our long-lasting surface quality. GROHE uses state-of-the-art technology to deliver exceptional quality finishes.

The physical vapour deposition (PVD) process ensures that the surface composition is three times harder than chrome, delivering glistening gold or sophisticated stainless steel finishes. As well as being harder, the surface is also ten times more scratch resistant than chrome, so it can be cherished for a lifetime.

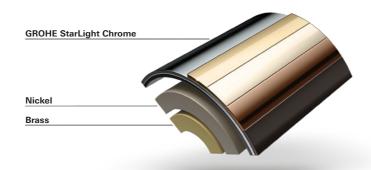

3 x MORE SURFACE HARDNESS THAN CHROME 10 x MORE SCRATCH RESISTANCE THAN CHROME



GROHE FASTFIXATION PLUS

INSTALLATION IN A BREATH

The new GROHE FastFixation Plus technology brings a new era in terms of installation of kitchen faucets. The unique and not comparable GROHE FastFixation Plus system enables an ultrafast setting up without any tools! Up to 65 % less time consumption for the installation!





Color

Chrome

SuperSteel



30 442 000

Scala

Sink mixer with SmartControl

single hole installation GROHE StarLight chrome finish

pull-out spray with laminar metal spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume adjustment

from EcoJoy to Full Flow


temperature adjustment by turning of mixing valve on body swivel tubular spout, swivel area 140°

protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation – no tools needed

GROHE Zero isolated inner water ways - lead and nickel free



30 442 DC0

Scala

Sink mixer with SmartControl

GROHE StarLight finish

pull-out spray with laminar metal spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume

adjustment from EcoJoy to Full Flow

temperature adjustment by turning of mixing valve on body

swivel tubular spout, swivel area 140°


protected against backflow flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation – no tools needed

Chrome

SuperSteel

GROHE Zero isolated inner water ways - lead and nickel free



30 444 000

Accent

Sink mixer with SmartControl

GROHE StarLight chrome finish

GROHE Magnetic Docking guarantees easy retraction and smooth docking of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume adjustment

from EcoJoy to Full Flow


temperature adjustment by turning of mixing valve on body swivel tubular spout, swivel area 140°

protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation - no tools needed

GROHE Zero isolated inner water ways – lead and nickel free



30 444 DC0

Sink mixer with SmartControl single hole installation

GROHE StarLight finish

pull-out spray with laminar metal spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking
of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume adjustment

from EcoJoy to Full Flow

temperature adjustment by turning of mixing valve on body swivel tubular spout, swivel area 140°

protected against backflow flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation - no tools needed GROHE Zero isolated inner water ways - lead and nickel free

Color

Chrome



30 443 000

Sink mixer with SmartControl

single hole installation

GROHE StarLight chrome finish pull-out spray with laminar metal spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume adjustment

from EcoJoy to Full Flow

temperature adjustment by turning of mixing valve on body

swivel tubular spout, swivel area 140°


protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation – no tools needed

GROHE Zero isolated inner water ways - lead and nickel free





- 199 -

30 443 DC0

SuperSteel

Vento

Sink mixer with SmartControl

GROHE StarLight finish

pull-out spray with laminar metal spray GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

GROHE SmartControl push for ON-OFF, turn for volume adjustment

from EcoJoy to Full Flow

temperature adjustment by turning of mixing valve on body


swivel tubular spout, swivel area 140°

protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation – no tools needed GROHE Zero isolated inner water ways – lead and nickel free





30 440 000

Chrome

Single-lever sink mixer 1/2"

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

pull-out spray with 3 spray types

diverter: laminar spray / SpeedClean shower jet / GROHE Blade spray (reduced water consumption by up to 70 % and even stronger spray

stop function - pause button to stop the water flow

automatic return to laminar spray adjustable flow rate limiter


swivel tubular spout, swivel area 360°

protected against backflow

GROHE FastFixation Plus ultra fast and simple installation - no tools needed

GROHE Zero isolated inner water ways - lead and nickel free





30 440 DC0

SuperSteel

BEST OF THE BES

Single-lever sink mixer 1/2" single hole installation

GROHE StarLight finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Magnetic Docking guarantees easy retraction

and smooth docking of the spray head back to the

starting position

pull-out spray with 3 spray types diverter: laminar spray / **SpeedClean** shower jet / GROHE Blade spray

(reduced water consumption by up to 70 % and even stronger spray

performance)

stop function – pause button to stop the water flow

automatic return to laminar spray adjustable flow rate limiter


swivel tubular spout, swivel area 360°

flexible connection hoses

protected against backflow

GROHE FastFixation Plus ultra fast and simple installation - no tools needed

GROHE Zero isolated inner water ways - lead and nickel free



Color

Chrome

30 441 000

Single-lever sink mixer 1/2"

single hole installation

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

pull-out dual spray

diverter: laminar spray / SpeedClean shower jet automatic return to laminar spray

adjustable flow rate limiter

swivel tubular spout, swivel area 360°


protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation - no tools needed

GROHE Zero isolated inner water ways - lead and nickel free





30 441 DC0

SuperSteel

Chrome

SuperSteel

Single-lever sink mixer 1/2"

GROHE StarLight finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position

pull-out dual spray

diverter: laminar spray / SpeedClean shower jet

automatic return to laminar spray

adjustable flow rate limiter


swivel tubular spout, swivel area 360° protected against backflow

flexible connection hoses

GROHE FastFixation Plus ultra fast and simple installation - no tools needed

GROHE Zero isolated inner water ways - lead and nickel free





30 432 000

Single-lever sink mixer 1/2"

high spout

single hole installation

GROHE StarLight chrome finish
GROHE SilkMove 28 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking

back to the starting position

pull-out $\bar{\textbf{dual}}$ spray – switches back and forth between regular flow and spray

diverter: laminar spray / SpeedClean shower jet automatic return to laminar spray

metal spray

swivel tubular spout, swivel area 360°


integrated non-return valve

integrated temperature limiter

protected against backflow

flexible connection hoses, rapid installation system min. recommended pressure 1.0 bar





30 432 DC0

Accent Single-lever sink mixer 1/2"

high spout single hole installation

to the starting position

GROHE StarLight finish
GROHE SilkMove 28 mm ceramic cartridge GROHE EasyDock guarantees easy retraction and smooth docking back

flow straighte

pull-out dual spray - switches back and forth between regular flow and spray diverter: laminar spray/SpeedClean shower jet

automatic return to laminar spray

metal spray

swivel tubular spout, swivel area 360° integrated non-return valve

integrated temperature limiter

protected against backflow

flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar

Color

Chrome



Accent Single-lever sink mixer 1/2"

high spout

30 423 000

GROHE StarLight chrome finish


GROHE SilkMove 28 mm ceramic cartridge

swivel tubular spout, adjustable swivel area 0° / 150° / 360°

flexible connection hoses, rapid installation system

integrated temperature limite

min. recommended pressure 1.0 bar



30 423 DC0

SuperSteel

Chrome



Single-lever sink mixer 1/2"

high spout single hole installation

GROHE StarLight finish

GROHE SilkMove 28 mm ceramic cartridge

mousseur

swivel tubular spout, adjustable swivel area 0° / 150° / 360°

flexible connection hoses, rapid installation system

integrated temperature limiter

min. recommended pressure 1.0 bar



30 437 000

Vento

Single-lever sink mixer 1/2"

L-spout

GROHE StarLight chrome finish GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position flow straightener

pull-out dual spray – switches back and forth between regular flow and spray diverter: laminar spray / SpeedClean shower jet

automatic return to laminar spray

metal spray

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow

flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 437 DC0

SuperSteel

Single-lever sink mixer 1/2"

L-spout

single hole installation

GROHE StarLight finish
GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out dual spray – switches back and forth between regular flow and spray diverter: laminar spray / SpeedClean shower jet

automatic return to laminar spray

metal spray

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow

flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 438 000

Chrome

Color

SuperSteel

Chrome

Single-lever sink mixer 1/2" C-spout

Article No. (SKU)

GROHE StarLight chrome finish

GROHE SilkMove 46 mm ceramic cartridge GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out dual spray diverter: laminar spray / SpeedClean shower jet


adjustable flow rate limite

swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 438 DC0

Vento Single-lever sink mixer 1/2"

C-spout

single hole installation

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position pull-out dual spray

diverter: laminar spray / SpeedClean shower jet


adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 439 000

Single-lever sink mixer 1/2"

U-spout

single hole installation **GROHE StarLight** finish

GROHE SilkMove 46 mm ceramic cartridge
GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out dual spray


diverter: laminar spray / SpeedClean shower jet

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar







SuperSteel

U-spout single hole installation

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position pull-out dual spray

diverter: laminar spray / SpeedClean shower jet

adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valve, protected against backflow flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar

GROHE KITCHEN SELECTION SINK MIXER PRODUCT OVERVIEW grohe.com


Article No. (SKU)

Color

Chrome

Article No. (SKU)

Color



30 434 000

Single-lever sink mixer 1/2"

C-spout

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out mousseur

adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system optional temperature limiter ref. no. 46 308

min. recommended pressure 1.0 bar





SuperSteel

Vento

Single-lever sink mixer 1/2"

C-spout

single hole installation

GROHE StarLight finish
GROHE SilkMove 46 mm ceramic cartridge
GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out mousseur

adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system

optional temperature limiter ref. no. 46 308

min. recommended pressure 1.0 bar







Chrome

SuperSteel

Vento

Single-lever sink mixer 1/2"

U-spout

GROHE StarLight finish
GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out mousseur

adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system min. recommended pressure 1.0 bar



Vento

Single-lever sink mixer 1/2"

U-spout

GROHE StarLight finish
GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position pull-out mousseur

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 436 000

Chrome

Single-lever sink mixer 1/2"

L-spout

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge
GROHE EasyDock guarantees easy retraction and smooth docking back

to the starting position

pull-out mousseur


adjustable flow rate limiter

swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system





30 436 DC0

SuperSteel

Chrome

SuperSteel

13

Single-lever sink mixer 1/2" L-spout

single hole installation

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge

GROHE EasyDock guarantees easy retraction and smooth docking back to the starting position


pull-out mousseur

adjustable flow rate limiter swivel tubular spout, swivel area 360°

integrated non-return valves, protected against backflow

flexible connection hoses, rapid installation system





30 425 000 Vento

Single-lever sink mixer 1/2"

GROHE StarLight chrome finish GROHE SilkMove 46 mm ceramic cartridge


adjustable flow rate limiter

swivel tubular spout, swivel range 0° / 150° / 360°

flexible connection hoses, rapid installation system

min. recommended pressure 1.0 bar





30 425 DC0

Single-lever sink mixer 1/2"

GROHE StarLight finish GROHE SilkMove 46 mm ceramic cartridge

adjustable flow rate limiter

swivel tubular spout, swivel range 0° / 150° / 360° flexible connection hoses, rapid installation system min. recommended pressure 1.0 bar

Color

Chrome

Chrome

SuperSteel



Single-lever sink mixer 1/2"

C-spout

30 427 000

GROHE StarLight finish GROHE SilkMove 46 mm ceramic cartridge


adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150° / 360° flexible connection hoses, connector set 3/8"

rapid installation system

optional temperature limiter ref. no. 46 308





30 427 DC0

SuperSteel

Single-lever sink mixer 1/2"

C-spout single hole installation

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge


adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150° / 360°

flexible connection hoses, connector set 3/8"

rapid installation system optional temperature limiter ref. no. 46 308





30 429 000

Vento

Single-lever sink mixer 1/2"

U-spout


GROHE StarLight finish GROHE SilkMove 46 mm ceramic cartridge

adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150° / 360°

flexible connection hoses, rapid installation system optional temperature limiter ref. no. 46 308





30 429 DC0

Single-lever sink mixer 1/2"

U-spout

single hole installation

GROHE StarLight finish

GROHE SilkMove 46 mm ceramic cartridge


adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150° / 360°

flexible connection hoses, rapid installation system

optional temperature limiter ref. no. 46 308





30 433 000

Chrome

Color

Viamo

Single-lever sink mixer 1/2"

Article No. (SKU)

single hole installation GROHE StarLight chrome finish

GROHE SilkMove 28 mm ceramic cartridge

flow straightener

with integrated temperature limiter

professional spray

with flexible, hygienic **GROHFlexx kitchen** santoprene hose

diverter: laminar spray / SpeedClean shower jet

automatic return to laminar spray


GROHE Magnetic Docking guarantees easy retraction and smooth docking

of the spray head back to the starting position swivel spout, swivel area 360°

protected against backflow

flexible connection hoses, rapid installation system





30 431 000

mousseur

Chrome

Via Cosmo

Single-lever sink mixer 1/2" high spout

single hole installation

GROHE StarLight chrome finish
GROHE SilkMove 35 mm ceramic cartridge

GROHE Zero isolated inner water ways – lead and nickel free


adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150°

flexible connection hoses

GROHE QuickFix rapid installation system





30 431 DC0

SuperSteel

Via Cosmo

Single-lever sink mixer 1/2" high spout

single hole installation

GROHE StarLight finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Zero isolated inner water ways - lead and nickel free mousseur


adjustable flow rate limiter

swivel tubular spout, selectable swivel area: 0° / 150°

flexible connection hoses

GROHE QuickFix rapid installation system





30 465 000

Chrome

Single-lever sink mixer 1/2"

low spout

single hole installation

GROHE StarLight chrome finish
GROHE SilkMove 35 mm ceramic cartridge

integrated temperature limiter

adjustable flow rate limiter

swivel cast spout, swivel area 140°

GROHE Zero isolated inner water ways - lead and nickel free

mousseur with coin slot for tool free replacement

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar

Color

SuperSteel



Single-lever sink mixer 1/2"

low spout

30 465 DC0

single hole installation

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

integrated temperature limiter adjustable flow rate limiter

swivel cast spout, swivel area 140°

GROHE Zero isolated inner water ways - lead and nickel free mousseur with coin slot for tool free replacement


flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar







- 222

30 464 000

Chrome

Single-lever sink mixer 1/2"

medium spout single hole installation

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

integrated temperature limiter

adjustable flow rate limiter

swivel cast spout, swivel area 140°

GROHE Zero isolated inner water ways – lead and nickel free

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar

30 464 DC0

SuperSteel



Single-lever sink mixer 1/2"

medium spout

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

integrated temperature limiter

adjustable flow rate limiter swivel cast spout, swivel area 140°

GROHE Zero isolated inner water ways - lead and nickel free

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar

33 222 000

Single-lever sink mixer 1/2"

single hole installation


adjustable flow rate limiter

GROHE Zero isolated inner water ways – lead and nickel free

flexible connection hoses 3/8"

Chrome





GROHE StarLight chrome finish
GROHE SilkMove 35 mm ceramic cartridge

integrated temperature limiter

mousseur

swivel tubular spout, swivel area 150°

GROHE FastFixation Plus installation system min. recommended pressure 1.0 bar

Article No. (SKU)

Color

Chrome

Chrome

Chrome

33 422 000

Single-lever sink mixer 1/2"

integrated stop valve

high spout

single hole installation

GROHE StarLight chrome finish
GROHE SilkMove ES 35 mm ceramic cartridge
with energy saving function via cold start

mousseur

adjustable flow rate limiter

swivel tubular spout, adjustable swivel area 0° / 90° / 360°

GROHE Zero isolated inner water ways - lead and nickel free

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

30 568 000

Single-lever sink mixer 1/2"

high spout single hole installation

GROHE StarLight chrome finish

GROHE SilkMove 28 mm ceramic cartridge

integrated temperature limiter

adjustable flow rate limiter

swivel tubular spout, swivel area 150°

GROHE Zero isolated inner water ways – lead and nickel free

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar

30 568 DC0

SuperSteel

Single-lever sink mixer 1/2"

Via

high spout

GROHE StarLight finish

GROHE SilkMove 28 mm ceramic cartridge integrated temperature limiter

mousseur

adjustable flow rate limiter


swivel tubular spout, swivel area 150° GROHE Zero isolated inner water ways - lead and nickel free

flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar





30 493 000

Two handle sink mixer high spout

single hole installation

GROHE StarLight chrome finish cartridge: ceramic head parts, 90° turn angle

integrated temperature limiter

mousseur swivel tubular spout, adjustable swivel area 0° / 150° / 360°

GROHE Zero isolated inner water ways – lead and nickel free flexible connection hoses 3/8"

GROHE FastFixation Plus installation system

min. recommended pressure 1.0 bar


GROHE KITCHEN SELECTION SINK MIXER TABLE OF CONTENT

ARTICLE NO. (SKU)	COLLECTION	DESCRIPTION	COLOR	PAGE NO.	RRP
30 442 000	Scala	Sink mixer with SmartControl	Chrome	07	
30 442 DC0	Scala	Sink mixer with SmartControl	SuperSteel	07	
30 444 000	Accent	Sink mixer with SmartControl	Chrome	07	
30 444 DC0	Accent	Sink mixer with SmartControl	SuperSteel	07	
30 443 000	Vento	Sink mixer with SmartControl	Chrome	08	
30 443 DC0	Vento	Sink mixer with SmartControl	SuperSteel	08	
30 440 000	Scala	Single-lever sink mixer 1/2"	Chrome	08	
30 440 DC0	Scala	Single-lever sink mixer 1/2"	SuperSteel	08	
30 441 000	Scala	Single-lever sink mixer 1/2"	Chrome	09	
30 441 DC0	Scala	Single-lever sink mixer 1/2"	SuperSteel	09	
30 432 000	Accent	Single-lever sink mixer 1/2"	Chrome	09	
30 432 DC0	Accent	Single-lever sink mixer 1/2"	SuperSteel	09	
30 423 000	Accent	Single-lever sink mixer 1/2"	Chrome	10	
30 423 DC0	Accent	Single-lever sink mixer 1/2"	SuperSteel	10	
30 437 000	Vento	Single-lever sink mixer 1/2"	Chrome	10	
30 437 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	10	
30 438 000	Vento	Single-lever sink mixer 1/2"	Chrome	11	
30 438 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	11	
30 439 000	Vento	Single-lever sink mixer 1/2"	Chrome	11	
30 439 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	11	
30 434 000	Vento	Single-lever sink mixer 1/2"	Chrome	12	
30 434 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	12	
30 435 000	Vento	Single-lever sink mixer 1/2"	Chrome	12	
30 435 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	12	
30 436 000	Vento	Single-lever sink mixer 1/2"	Chrome	13	
30 436 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	13	
30 425 000	Vento	Single-lever sink mixer 1/2"	Chrome	13	
30 425 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	13	
30 427 000	Vento	Single-lever sink mixer 1/2"	Chrome	14	
30 427 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	14	
30 429 000	Vento	Single-lever sink mixer 1/2"	Chrome	14	
30 429 DC0	Vento	Single-lever sink mixer 1/2"	SuperSteel	14	
30 433 000	Viamo	Single-lever sink mixer 1/2"	Chrome	15	
30 431 000	Via Cosmo	Single-lever sink mixer 1/2"	Chrome	15	
30 431 DC0	Via Cosmo	Single-lever sink mixer 1/2"	SuperSteel	15	

ARTICLE NO. (SKU)	COLLECTION	DESCRIPTION	COLOR	PAGE NO.	RRP
30 465 000	Via	Single-lever sink mixer, low spout	Chrome	15	
30 465 DC0	Via	Single-lever sink mixer, low spout	SuperSteel	16	
30 464 000	Via	Single-lever sink mixer, medium spout	Chrome	16	
30 464 DC0	Via	Single-lever sink mixer, medium spout	SuperSteel	16	
33 222 000	Via	Single-lever sink mixer, high spout	Chrome	16	
33 422 000	Via	Sink mixer with SmartControl, C-spout, with shut-off valve	Chrome	17	
30 568 000	Via	Single-lever sink mixer, high spout	Chrome	17	
30 568 DC0	Via	Single-lever sink mixer, high spout	SuperSteel	17	
30 493 000	Via	Two handle sink mixer, high spout	Chrome	17	

Color





31 884 AP0

Granite Black

Kitchen sink and tap bundle

consisting of: K400 composite sink with drainer (31 641 AP0), Via single lever sink mixer, low spout, single hole installation (30 465 000)

GROHE StarLight chrome finish

GROHE SilkMove 35 mm ceramic cartridge

adjustable flow rate limiter swivel cast spout, swivel area 140° mousseur with coin slot for tool free replacement

flexible connection hoses

GROHE Zero isolated inner water ways - lead and nickel free

GROHE FastFixation Plus installation system

amount of fasteners included (top mount): 12 outer radius: R6 (top mount), inner bowl radius: R10

31 885 AP0

Granite Black

Kitchen sink and tap bundle

consisting of: K400 composite sink with drainer (31 641 AP0), BauClassic single lever sink mixer, high spout, single hole installation (31 535 001)

GROHE StarLight chrome finish

GROHE Longlife 28 mm ceramic cartridge

swivel tubular spout, swivel area 360°

flexible connection hoses


GROHE Zero isolated inner water ways – lead and nickel free

GROHE FastFixation Plus installation system

amount of fasteners included (top mount): 12

outer radius: R6 (top mount), inner bowl radius: R10







Brushed Warm Sunset

Brushed Hard Graphite Brushed Cool Sunrise

material: stainless steel AISI 304 (V2A) plus PVD coating

material thickness: 1 mm

drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket

strainer waste, mounting set













model: K700U 60-S 54.4/44.4 1.0 mounting type: undermount

GROHE StarLight finish finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 540 x 440 mm 1 bowl: 500 x 400 x 195 mm

outer radius: R16 (undermount) / R3 (top mount), inner bowl radius: R15 GROHE FastFixation rapid installation system cut-out: 500 x 400 mm

optional push to open excenter (40 986 SD0) is only available in SD0 / launch in other colors planned for end of this FY (AL0, GN0, DL0) amount of fasteners included (top mount): 8 amount of fasteners included (undermount): 8





Color

Stainless Steel

Stainless Steel

Stainless Steel

31 582 SD1

K1000 Stainless steel sink with drainer

model: K1000 80-S 116/52 1.0 rh mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 1.2 mm GROHE StarLight finish finish: satin finish

GROHE Whisper min. cabinet size: 800 mm

dimensions: 1160 x 520 mm 1 bowl: 710 x 400 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation rapid installation system


sink mountable right

cut-out (top mount): 1145 x 505 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 10





31 581 SD1

K1000

Stainless steel sink with drainer model: K1000 80-S 116/52 1.0 lh mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 1.2 mm

GROHE StarLight finish

finish: satin finish GROHE Whisper

min. cabinet size: 800 mm dimensions: 1160 x 520 mm 1 bowl: 710 x 400 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation rapid installation system


sink mountable left

cut-out (top mount): 1145 x 505 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 10





31 583 SD1

K800

Stainless steel sink model: K800 60-S 51.8/51 1.0

mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A)

material thickness: 1 mm GROHE StarLight finish

finish: satin finish

GROHE Whisper min. cabinet size: 600 mm

dimensions: 518 x 510 mm

1 bowl: 462 x 400 x 200 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation rapid installation system

cut-out (top mount): 503 x 495 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 8

Color

Article No. (SKU)


Color

Stainless Steel

Stainless Steel

Stainless Steel





31 584 SD1

K800

Stainless steel sink

mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A)

material thickness: 1 mm GROHE StarLight finish

finish: satin finish


GROHE Whisper

dimensions: 846 x 510 mm

outer radius: R3, inner bowl radius: R10
GROHE FastFixation rapid installation system

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set





31 585 SD1

mounting type: top mount or flush mount

material thickness: 1 mm

finish: satin finish

min. cabinet size: 1200 mm dimensions: 1024 x 510 mm

1 bowl: 462 x 400 x 200 mm

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set

31 586 SD1

K800

Stainless steel sink

material: stainless steel AISI 304 (V2A)

GROHE StarLight finish

dimensions: 1024 x 510 mm

outer radius: R3, inner bowl radius: R10

waste kit, basket strainer waste, mounting set

amount of fasteners included (top mount): 10

Stainless Steel

model: K800 90-S 84.6/51 1.0

min. cabinet size: 900 mm

1 bowl: 790 x 400 x 200 mm

cut-out (top mount): 831 x 495 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

Stainless Steel

Stainless Steel

K800

Stainless steel sink

model: K800 120-S 102.4/51 2.0

material: stainless steel AISI 304 (V2A)

GROHE StarLight finish

GROHE Whisper

2 bowl: 462 x 400 x 200 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation rapid installation system cut-out (top mount): 1009 x 495 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

model: K800 120-S 102.4/51 1.0

mounting type: top mount or flush mount

material thickness: 1 mm

finish: satin finish

GROHE Whisper


min. cabinet size: 1200 mm

1 bowl: 968 x 400 x 200 mm

GROHE FastFixation rapid installation system cut-out (top mount): 1009 x 495 mm waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

optional push to open excenter (40 986 SD0)



31 855 SD0

K800

Stainless steel sink

model: K800 90-S 86/50 2.0 lh mounting type: top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1.2 mm GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 900 mm dimensions: 860 x 500 mm

1 bowl: 430 x 450 x 200 mm

2 bowl: 300 x 401 x 200 mm **GROHE FastFixation** installation system

cut-out (top mount): 845 x 485 mm


drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket

strainer waste, mounting set

amount of fasteners included (top mount): 10





31 574 SD1

K700U

Stainless steel sink model: K700U 60-S 54.4/44.4 1.0

mounting type: undermount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm GROHE StarLight finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 540 x 440 mm

1 bowl: 500 x 400 x 195 mm


outer radius: R16 (undermount) / R3 (top mount), inner bowl radius: R15 GROHE FastFixation rapid installation system

cut-out: 500 x 400 mm drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 8 amount of fasteners included (undermount): 8





31 575 SD1

K700U

Stainless steel sink model: K700U 80-S 76/45 1.5 lh

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A) material thickness: 1 mm

GROHE StarLight finish

finish: satin finish GROHE Whisper

min. cabinet size: 800 mm

dimensions: 760 x 450 mm

1 bowl: 500 x 400 x 195 mm 0.5 bowl: 180 x 400 x 200 mm

outer radius: R16 (undermount) / R3 (top mount), inner bowl radius: R15 GROHE FastFixation rapid installation system

sink mountable left

cut-out (undermount): 712 x 402 mm (R16)

cut-out (top mount): 745 x 435 mm drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8 amount of fasteners included (undermount): 8

Color

Stainless Steel

Stainless Steel

Stainless Steel

Article No. (SKU)


Color

Stainless Steel

Stainless Steel

Stainless Steel





31 576 SD1

K700U

Stainless steel sink

model: K700U 60-S 59.5/45 1.5 rh

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A) material thickness: 1 mm

GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm dimensions: 595 x 450 mm

1 bowl: $340 \times 400 \times 200 \text{ mm}$

0.5 bowl: $180 \times 400 \times 140 \text{ mm}$

outer radius: R16 (undermount) / R3 (top mount), inner bowl radius: R15 GROHE FastFixation rapid installation system

sink mountable right

cut-out (undermount): 547 x 402 mm (R16)

cut-out (top mount): 580 x 435 mm

drainer: Ø 3.5"/90 mm basket strainer waste accessories included: waste kit, basket

strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

31 577 SD1

K700U

Stainless steel sink

model: K700U 60-S 59.5/45 1.5 lh

mounting type: undermount, top mount or flush mount material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm dimensions: 595 x 450 mm

1 bowl: 340 x 400 x 200 mm

0.5 bowl: 180 x 400 x 140 mm

outer radius: R16 (undermount) / R3 (top mount), inner bowl radius: R15

GROHE FastFixation rapid installation system

sink mountable left

cut-out (undermount): 547 x 402 mm (R16)

cut-out (top mount): 580 x 435 mm drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket

strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8 amount of fasteners included (undermount): 8

31 578 SD1

K700

Stainless steel sink model: K700 45-S 46.4/46.4 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE StarLight finish finish: satin finish

GROHE Whisper

min. cabinet size: 450 mm

dimensions: 464 x 464 mm

1 bowl: 400 x 400 x 200 mm

outer radius: R11 (undermount) / R3 (top mount), inner bowl radius: R10

GROHE FastFixation rapid installation system

cut-out (undermount): 402 x 402 mm (R11) cut-out (top mount): 449 x 449 mm drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket


strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8





31 726 SD0

K700

Stainless steel sink

model: K700 60-S 55/45 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm GROHE StarLight finish

finish: satin finish **GROHE Whisper**

min. cabinet size: 600 mm

dimensions: 550 x 450 mm 1 bowl: $500 \times 400 \times 200 \text{ mm}$

outer radius: R11 (undermount) / R3 (top mount), inner bowl radius: R10 GROHE FastFixation rapid installation system cut-out (undermount): 502 x 402 mm (R11)

cut-out (top mount): 535 x 435 mm

drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket

strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

31 580 SD1 K700

Stainless steel sink

model: K700 90-S 86.4/46.4 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 900 mm

dimensions: 864 x 464 mm

1 bowl: $800 \times 400 \times 200 \text{ mm}$

outer radius: R11 (undermount) / R3 (top mount), inner bowl radius: R10 GROHE FastFixation rapid installation system

cut-out (undermount): 802 x 402 mm (R11)


cut-out (top mount): 849 x 449 mm

drainer: Ø 3.5"/90 mm basket strainer waste accessories included: waste kit, basket

strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8



31 571 SD1 K500

Stainless steel sink with drainer

model: K500 45-S 86/50 1.0 rev

mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 0.7 mm

GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 450 mm

dimensions: 860 x 500 mm 1 bowl: 340 x 420 x 170 mm outer radius: R6 (top mount), inner bowl radius: R65

GROHE FastFixation rapid installation system

sink mountable left or right

cut-out (top mount): 842 x 482 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 14

Color

31 577 SD1

K500

mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 0.7 mm

GROHE StarLight finish

GROHE Whisper

min. cabinet size: 600 mm dimensions: 1000 x 500 mm

outer radius: R6 (top mount), inner bowl radius: R75

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 16

31 572 SD1

Stainless steel sink with drainer

mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 0.7 mm

GROHE StarLight finish

GROHE Whisper

1 bowl: 340 x 420 x 185 mm 0.5 bowl: 170 x 320 x 125 mm

GROHE FastFixation rapid installation system

sink mountable left or right

drilling holes: 2 x 35 mm

strainer waste, mounting set

optional push to open excenter (40 986 SD0)

31 588 SD1

Stainless steel sink with drainer

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Whisper

1 bowl: 340 x 420 x 190 mm

outer radius: R6 (top mount), inner bowl radius: R90

GROHE FastFixation rapid installation system

sink mountable left or right

cut-out (top mount): 1140 x 480 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting

waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

Stainless Steel

Stainless steel sink with drainer

model: K500 60-S 100/50 1.0 rev

finish: satin finish

1 bowl: 450 x 400 x 180 mm

GROHE FastFixation rapid installation system

sink mountable left or right

cut-out (top mount): 982 x 482 mm

drilling holes: 2 x 35 mm

Stainless Steel

Stainless Steel

model: K500 60-S 100/50 1.5 rev

finish: satin finish


min. cabinet size: 600 mm dimensions: $1000 \times 500 \text{ mm}$

outer radius: R6 (topmount), inner bowl radius: R65

cut-out (top mount): 982 x 482 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: waste kit, basket

amount of fasteners included (top mount): 16



170

model: K500 80-S 116/50 2.0 rev mounting type: top mount or flush mount

GROHE StarLight finish

finish: satin finish

min. cabinet size: 800 mm dimensions: 1160 x 500 mm

2 bowl: 340 x 420 x 190 mm

accessories included: automatic waste fitting with rotary handle,

amount of fasteners included (top mount): 18

Article No. (SKU)

Color

Stainless Steel

Stainless Steel

Stainless Steel

31 568 SD0

K400+

Stainless steel sink with drainer

model: K400+ 45-S 87.3/51.3 1.0 rev mounting type: flat edge material: stainless steel AISI 316 (V4A)

material thickness: 0.7 mm GROHE StarLight finish

finish: satin finish

GROHE Whisper min. cabinet size: 450 mm

dimensions: 873 x 513 mm

1 bowl: 363 x 400 x 188 mm

outer radius: R10, inner bowl radius: R95 GROHE FastFixation rapid installation system

sink mountable left or right

cut-out: 840 x 480 mm drilling holes: 2 x 35 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set amount of fasteners included (flat edge): 18

31 569 SD0

Stainless steel sink with drainer

mounting type: flat edge

material thickness: 0.7 mm GROHE StarLight finish

finish: satin finish

min. cabinet size: 600 mm

dimensions: 983 x 513 mm

0.5 bowl: 150 x 300 x 188 mm outer radius: R10, inner bowl radius: R95

sink mountable left or right

cut-out: 950 x 480 mm

drainer: automatic waste fitting accessories included: waste kit, basket

31 566 SD0

Stainless steel sink with drainer

model: K400 45-S 86/50 1.0 rev

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm GROHE StarLight finish


finish: satin finish

GROHE Whisper


drilling holes: 2 x 35 mm

amount of fasteners included (top mount): 6





K400+



model: K400+ 60-S 98.3/51.3 1.5 rev

material: stainless steel AISI 316 (V4A)

GROHE Whisper


1 bowl: 363 x 400 x 188 mm

GROHE FastFixation rapid installation system

drilling holes: 2 x 35 mm

strainer waste, mounting set amount of fasteners included (flat edge): 18





K400

mounting type: standard built-in

min. cabinet size: 450 mm dimensions: 860 x 500 mm

1 bowl: 362.5 x 400 x 188 mm outer radius: R10, inner bowl radius: R95

GROHE FastFixation rapid installation system sink mountable left or right cut-out: 840 x 480 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set



Color

Stainless Steel


Article No. (SKU)

Color

Stainless Steel

Stainless Steel





31 567 SD0

K400

Stainless steel sink with drainer

model: K400 60-S 97/50 1.5 rev mounting type: standard built-in material: stainless steel AISI 304 (V2A) material thickness: 0.7 mm GROHE StarLight finish

finish: satin finish

GROHE Whisper


min. cabinet size: 600 mm dimensions: 970 x 500 mm 1 bowl: 363 x 400 x 188 mm 0.5 bowl: 150 x 300 x 188 mm outer radius: R10, inner bowl radius: R95

GROHE FastFixation rapid installation system

sink mountable left or right cut-out: 950 x 480 mm drilling holes: 2 x 35 mm drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set amount of fasteners included (top mount): 8





Ø116

31 587 SD0

Stainless Steel

K400 Stainless steel sink with drainer

model: K400 80-S 116/50 2.0 rev mounting type: standard built-in material: stainless steel AISI 304 (V2A) material thickness: 0.7 mm

GROHE StarLight finish

finish: satin finish

GROHE Whisper

min. cabinet size: 800 mm dimensions: 1160 x 500 mm

2 bowl: 362.5 x 400 x 188 mm outer radius: R10, inner bowl radius: R95

GROHE FastFixation rapid installation system

sink mountable left or right


cut-out: 1140 x 480 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

amount of fasteners included (top mount): 8





31 564 SD1

Stainless Steel

K200

Stainless steel sink with drainer

model: K200 60-S 96.5/50 1.5 rev mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.6 mm

GROHE StarLight finish

finish: satin finish

GROHE Whisper min. cabinet size: 600 mm

dimensions: 965 x 500 mm

1 bowl: 346 x 396 x 165 mm

0.5 bowl: 180 x 340 x 130 mm

outer radius: R10 (topmount), inner bowl radius: R100 GROHE FastFixation rapid installation system

sink mountable left or right

cut-out (top mount): 941 x 476 mm


drilling holes: 2 x 35 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 16





31 552 SD1

K200

Stainless steel sink with drainer

model: K200 45-S 86/50 1.0 rev mounting type: top mount material: stainless steel AISI 304 (V2A)

material thickness: 0.6 mm GROHE StarLight finish

finish: satin finish GROHE Whisper

min. cabinet size: 450 mm dimensions: 860 x 500 mm

1 bowl: $350 \times 400 \times 160 \text{ mm}$

outer radius: R6 (top mount), inner bowl radius: R100 GROHE FastFixation rapid installation system

sink mountable left or right

cut-out (top mount): 842 x 482 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5"/90 mm waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 14

31 720 SD0

K200

Stainless steel sink

model: K200 50-S Ø 44 1.0 mounting type: standard built-in

material: stainless steel AISI 304 (V2A)

GROHE Whisper min. cabinet size: 500 mm dimensions: Ø 440 mm

1 bowl: Ø 390 mm inner bowl radius: Ø 390

GROHE FastFixation rapid installation system

cut-out: Ø 422 mm drainer: Ø 3.5"/90 mm basket strainer waste

accessories included: waste kit, basket

strainer waste, mounting set amount of fasteners included (top mount): 5

31 719 SD0

K200

Ø118


Stainless steel sink

model: K200 60-S 53.3/45.8 1.0 rev mounting type: standard built-in material: stainless steel AISI 304 (V2A)

GROHE Whisper min. cabinet size: 600 mm

dimensions: 533 x 458 mm 1 bowl: 482 x 406 mm

cut-out: 517 x 442 mm



Stainless Steel

inner bowl radius: R60 GROHE FastFixation rapid installation system

drainer: Ø 3.5"/90 mm basket strainer waste accessories included: waste kit, basket

strainer waste, mounting set

amount of fasteners included (top mount): 8



Color

Granite Gray

Granite Black



Granite Gray Granite Black

Composite sink

model: K700U 50-C 45.7/40.6 1.0 mounting type: standard built-in and undermount material: quartz composite

GROHE Whisper


min. cabinet size: 500 mm dimensions: 457 x 406 mm 1 bowl: 417 x 366 x 203 mm

outer radius: R6, inner bowl radius: R10 GROHE FastFixation installation system

cut-out: 417 x 366 mm drainer: Ø 3.5"/90 mm basket strainer waste optional push to open excenter (40 986 SD0) accessories included: waste kit, basket strainer waste, mounting set

mounting with silicone (top mount) amount of fasteners included (undermount): 8 optional push to open excenter (40 986 SD0)





533--

417

457-

31 654 AT0 31 654 AP0

K700U

Composite sink model: K700U 60-C 53.3/45.7 1.0 mounting type: standard built-in and undermount material: quartz composite

GROHE Whisper


min. cabinet size: 600 mm dimensions: 533 x 457 mm 1 bowl: 469 x 393 x 205 mm

GROHE FastFixation installation system

cut-out: 468 x 390 mm drainer: Ø 3.5"/90 mm basket strainer waste optional push to open excenter (40 986 SD0) accessories included: waste kit, basket

strainer waste, mounting set amount of fasteners included (top mount): 6 amount of fasteners included (undermount): 6 outer radius: R7, inner bowl radius: R10





31 655 AT0 31 655 AP0

Granite Gray Granite Black

K700U

Composite sink

model: K700U 70-C 61/45.7 1.0 mounting type: standard built-in and undermount material: quartz composite

GROHE Whisper

min. cabinet size: 700 mm dimensions: 610 x 460 mm 1 bowl: 544 x 394 x 205 mm

GROHE FastFixation installation system

cut-out: 543 x 393 mm

drainer: Ø 3.5"/90 mm basket strainer waste optional push to open excenter (40 986 SD0) accessories included: waste kit, basket strainer waste, mounting set amount of fasteners included (top mount): 6 amount of fasteners included (undermount): 6 outer radius: R3, inner bowl radius: R10

Color

Granite Gray


Granite Black

Granite Grav

Granite Black

Article No. (SKU)





31 650 AT0 31 650 AP0

Granite Gray Granite Black

K700 Composite sink

model: K700 50-C 40/50 1.0

mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 500 mm dimensions: 400 x 500 mm 1 bowl: 340 x 370 x 200 mm

GROHE FastFixation installation system

cut-out: 380 x 480 mm


drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 6

outer radius: R6, inner bowl radius: R45





31 651 AT0 31 651 AP0

K700

Composite sink

model: K700 60-C 56/51 1.0 mounting type: standard built-in

material: quartz composite GROHE Whisper min. cabinet size: 600 mm dimensions: 560 x 510 mm

1 bowl: 500 x 360 x 200 mm GROHE FastFixation installation system


cut-out: 545 x 495 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 8

outer radius: R6, inner bowl radius: R10





31 652 AT0 31 652 AP0

K700

Composite sink

model: K700 80-C 78/51 1.0 mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 800 mm dimensions: $780 \times 510 \text{ mm}$ 1 bowl: 720 x 370 x 220 mm

GROHE FastFixation installation system


cut-out: 764 x 494 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 9 outer radius: R6, inner bowl radius: R10





31 657 AT0

31 657 AP0

Granite Gray Granite Black

Granite Gray

Granite Black

Granite Gray

Color

K700

Composite sink

model: K700 90-C 83.8/55.9 2.0 mounting type: standard built-in and undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 900 mm dimensions: 838 x 559 mm 1 bowl: 406 x 438 x 241 mm 1 bowl: 316 x 438 x 241 mm

outer radius: R6, inner bowl radius: R15

GROHE FastFixation installation system

sink mountable left

cut-out (top mount): 818 x 539 mm cut-out (undermount installation): 757 x 437 mm

drainer: automatic waste fitting


accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 9 amount of fasteners included (undermount): 9





31 658 AT0 31 658 AP0

K700 Composite sink

model: K700 100-C 90/50 2.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 1000 mm dimensions: 900 x 500 mm

1 bowl: 465 x 443 x 230 mm

1 bowl: 315 x 443 x 230 mm

GROHE FastFixation installation system

cut-out: 880 x 480 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle,


waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

outer radius: R6, inner bowl radius: R8





31 644 AT0 31 644 AP0

K500

Composite sink with drainer

model: K500 50-C 86/50 1.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 500 mm dimensions: 860 x 500 mm

1 bowl: 347 x 440 x 200 mm **GROHE FastFixation** installation system

sink mountable left or right

cut-out: 840 x 480 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12 outer radius: R6, inner bowl radius: R12


Color

Granite Gray

Granite Black

Article No. (SKU) Color





31 645 AT0

31 645 AP0 K500

Composite sink with drainer model: K500 60-C 100/50 1.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm dimensions: 1000 x 500 mm 1 bowl: 480 x 440 x 200 mm

GROHE FastFixation installation system


sink mountable left or right cut-out: 980 x 480 mm drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 12

outer radius: R6, inner bowl radius: R12





31 646 AT0 31 646 AP0

Granite Gray Granite Black

K500

Composite sink with drainer model: K500 60-C 100/50 1.5 rev

mounting type: standard built-in material: quartz composite **GROHE Whisper**

min. cabinet size: 600 mm

dimensions: 1000 x 500 mm 1 bowl: 345 x 440 x 200 mm 0.5 bowl: 155 x 295 x 146 mm

GROHE FastFixation installation system

sink mountable left or right cut-out: 980 x 480 mm

drainer: automatic waste fitting


accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12

outer radius: R6, inner bowl radius: big bowl R12, small bowl R10





31 647 AT0 31 647 AP0

Granite Gray Granite Black

K500

Composite sink with drainer

model: K500 80-C 116/50 2.0 rev mounting type: standard built-in material: quartz composite GROHE Whisper

min. cabinet size: 800 mm dimensions: 1160 x 500 mm 1 bowl: 330 x 440 x 200 mm 2 bowl: 330 x 440 x 200 mm

GROHE FastFixation installation system


sink mountable left or right cut-out: 1140 x 480 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0) amount of fasteners included (top mount): 12 outer radius: R6, inner bowl radius: R12





31 648 AT0

31 648 AP0

Granite Gray Granite Black

K500

Composite sink

model: K500 60-C 55.5/46 1.5 rev mounting type: standard built-in and undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm dimensions: 555 x 460 mm 1 bowl: 335 x 400 x 200 mm

0.5 bowl: 155 x 400 x 140 mm outer radius: R6, inner bowl radius: big bowl R12, small bowl R10

GROHE FastFixation installation system

sink mountable left or right cut-out: 525 x 400 mm

drainer: Ø 3.5"/90 mm basket strainer waste

optional push to open excenter (40 986 SD0) accessories included: waste kit, basket

strainer waste, mounting set

optional push to open excenter (40 986 SD0)

mounting with silicone (top mount)

amount of fasteners included (undermount): 8


31 649 AT0

Granite Gray Granite Black

Granite Gray

Granite Black





31 649 AP0

K500 Composite sink

model: K500 90-C 86/50 2.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 900 mm dimensions: 860 x 500 mm 1 bowl: 390 x 430 x 200 mm

2 bowl: 380 x 365 x 200 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation installation system

sink mountable left cut-out: 840 x 480 mm


drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10





31 639 AT0 31 639 AP0

K400

Composite sink with drainer model: K400 50-C 78/50 1.0 rev mounting type: standard built-in

material: quartz composite

GROHE Whisper min. cabinet size: 500 mm dimensions: 780 x 500 mm

1 bowl: 347 x 440 x 205 mm outer radius: R6, inner bowl radius: R10

GROHE FastFixation installation system

sink mountable left or right

cut-out: 765 x 485 mm drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle.

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

Color

Granite Gray

Granite Black

Article No. (SKU) Color


Granite Gray

Granite Black

Granite Gray

Granite Black





31 640 AT0 31 640 AP0

K400 Composite sink with drainer

model: K400 50-C 86/50 1.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 500 mm dimensions: 860 x 500 mm 1 bowl: 337 x 420 x 205 mm outer radius: R6, inner bowl radius: R10

GROHE FastFixation installation system


sink mountable left or right cut-out: 840 x 480 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10





31 641 AT0 31 641 AP0

Granite Gray Granite Black

Granite Gray

Granite Black

K400

Composite sink with drainer model: K400 60-C 100/50 1.0 rev mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm dimensions: 1000 x 500 mm 1 bowl: $480 \times 420 \times 205 \text{ mm}$

outer radius: R6, inner bowl radius: R10

GROHE FastFixation installation system


sink mountable left or right cut-out: 980 x 480 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12



31 642 AT0 31 642 AP0

K400

Composite sink with drainer

model: K400 60-C 100/50 1.5 rev

mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm dimensions: 1000 x 500 mm

1 bowl: 335 x 420 x 205 mm 0.5 bowl: 155 x 295 x 146 mm

outer radius: R6, inner bowl radius: big bowl R10, small bowl R8

GROHE FastFixation installation system

sink mountable left or right cut-out: 980 x 480 mm


drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10





31 643 AT0 31 643 AP0

K400

Composite sink with drainer model: K400 80-C 116/50 1.5 rev

mounting type: standard built-in material: quartz composite

GROHE Whisper

min. cabinet size: 800 mm dimensions: 1160 x 500 mm 1 bowl: 400 x 420 x 205 mm 2 bowl: 295 x 295 x 205 mm

outer radius: R6, inner bowl radius: R10

GROHE FastFixation installation system

sink mountable left or right cut-out: 1140 x 480 mm

drainer: automatic waste fitting accessories included: automatic waste fitting with rotary handle,

waste kit, basket strainer waste, mounting set optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10



K200

31 656 AT0

model: K200 50-C 51 1.0 mounting type: standard built-in

GROHE Whisper

min. cabinet size: 500 mm dimensions: Ø 510 mm


GROHE FastFixation installation system

cut-out: Ø 490 mm

optional push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 3





Composite sink

material: quartz composite

1 bowl: Ø 380 x 200 mm inner bowl radius: Ø 380

drainer: automatic waste fitting

accessories included: waste kit, basket strainer waste, mounting set

GROHE KITCHEN SELECTION SINKS TABLE OF CONTENT

ARTICLE NO. (SKU)	DESCRIPTION	MATERIAL	COLOR	PAGE NO.	RRP
31 884 AP0	Composite sink and Via tap bundle	Composite	Granite Black	20	
31 885 AP0	Composite sink and Bau tap bundle	Composite	Granite Black	20	

ARTICLE NO. (SKU)	DESCRIPTION	MATERIAL	COLOR	PAGE NO.	RRP
31 574 AL1	K700U PVD sink	PVD	Brushed Hard Graphite	20	
31 574 GN1	K700U PVD sink	PVD	Brushed Cool Sunrise	20	
31 574 DL1	K700U PVD sink	PVD	Brushed Warm Sunset	20	

ARTICLE NO. (SKU)	DESCRIPTION	MATERIAL	PAGE NO.	RRP
31 582 SD1	K1000 sink with drainer	Stainless Steel	23	
31 581 SD1	K1000 sink with drainer	Stainless Steel	23	
31 583 SD1	K800 sink	Stainless Steel	23	
31 584 SD1	K800 sink	Stainless Steel	24	
31 585 SD1	K800 sink	Stainless Steel	24	
31 586 SD1	K800 sink	Stainless Steel	24	
31 574 SD1	K800 sink	Stainless Steel	25	
31 855 SD0	K800 sink	Stainless Steel	25	
31 575 SD1	K700U sink	Stainless Steel	25	
31 576 SD1	K700U sink	Stainless Steel	26	
31 577 SD1	K700U sink	Stainless Steel	26	
31 578 SD1	K700 sink	Stainless Steel	26	
31 726 SD0	K700 sink	Stainless Steel	27	
31 580 SD1	K700 sink	Stainless Steel	27	
31 571 SD1	K500 sink with drainer	Stainless Steel	27	
31 577 SD1	K500 sink with drainer	Stainless Steel	28	
31 572 SD1	K500 sink with drainer	Stainless Steel	28	
31 588 SD1	K500 sink with drainer	Stainless Steel	28	
31 568 SD0	K400+ sink with drainer	Stainless Steel	29	
31 569 SD0	K400+ sink with drainer	Stainless Steel	29	
31 566 SD0	K400 sink with drainer	Stainless Steel	29	
31 567 SD0	K400 sink with drainer	Stainless Steel	30	
31 587 SD0	K400 sink with drainer	Stainless Steel	30	
31 564 SD1	K200 sink with drainer	Stainless Steel	30	
31 552 SD1	K200 sink with drainer	Stainless Steel	31	
31 720 SD0	K200 sink	Stainless Steel	31	
31 719 SD0	K200 sink	Stainless Steel	31	

ARTICLE NO. (SKU)	DESCRIPTION	MATERIAL	COLOR	PAGE NO.	RRP
31 653 AT0 31 653 AP0	K700U sink	Composite	Granite Gray Granite Black	33	
31 654 AT0 31 654 AP0	K700U sink	Composite	Granite Gray Granite Black	33	
31 655 AT0 31 655 AP0	K700U sink	Composite	Granite Gray Granite Black	33	
31 650 AT0 31 650 AP0	K700 sink	Composite	Granite Gray Granite Black	34	
31 651 AT0 31 651 AP0	K700 sink	Composite	Granite Gray Granite Black	34	
31 652 AT0 31 652 AP0	K700 sink	Composite	Granite Gray Granite Black	34	
31 657 AT0 31 657 AP0	K700 sink	Composite	Granite Gray Granite Black	35	
31 658 AT0 31 658 AP0	K700 sink	Composite	Granite Gray Granite Black	35	
31 644 AT0 31 644 AP0	K500 sink with drainer	Composite	Granite Gray Granite Black	35	
31 645 AT0 31 645 AP0	K500 sink with drainer	Composite	Granite Gray Granite Black	36	
31 646 AT0 31 646 AP0	K500 sink with drainer	Composite	Granite Gray Granite Black	36	
31 647 AT0 31 647 AP0	K500 sink with drainer	Composite	Granite Gray Granite Black	36	
31 648 AT0 31 648 AP0	K500 sink	Composite	Granite Gray Granite Black	37	
31 649 AT0 31 649 AP0	K500 sink	Composite	Granite Gray Granite Black	37	
31 639 AT0 31 639 AP0	K400 sink with drainer	Composite	Granite Gray Granite Black	37	
31 640 AT0 31 640 AP0	K400 sink with drainer	Composite	Granite Gray Granite Black	38	
31 641 AT0 31 641 AP0	K400 sink with drainer	Composite	Granite Gray Granite Black	38	
31 642 AT0 31 642 AP0	K400 sink with drainer	Composite	Granite Gray Granite Black	38	
31 643 AT0 31 643 AP0	K400 sink with drainer	Composite	Granite Gray Granite Black	39	
31 656 AT0 31 656 AP0	K200 sink	Composite	Granite Gray Granite Black	39	

















"No.1 most trusted brand in the sanitary industry" -Wirtschaftswoche, 2017



TECHNOLOGY

"Top 50 companies to change the world"-

Fortune Magazine, 2017



DESIGN

Over **400 design awards** won since 2003



SUSTAINABILITY

Double award winner of the German Sustainability Award 2021

Grohe AG Feldmühleplatz 15 D - 40545 Düsseldorf Germany